




J-H(St)H EIB BUS

Motor power supply cable for EIB-Bus, halogen-free, screened

HALOGEN-FREE TELECOMMUNICATION, FIRE SIGNALING AND ELECTRONIC CABLES

For installation on and under plaster in dry, damp and wet locations, as a BUS cable (EIB installation bus) and as a measuring and control cable in power installations.

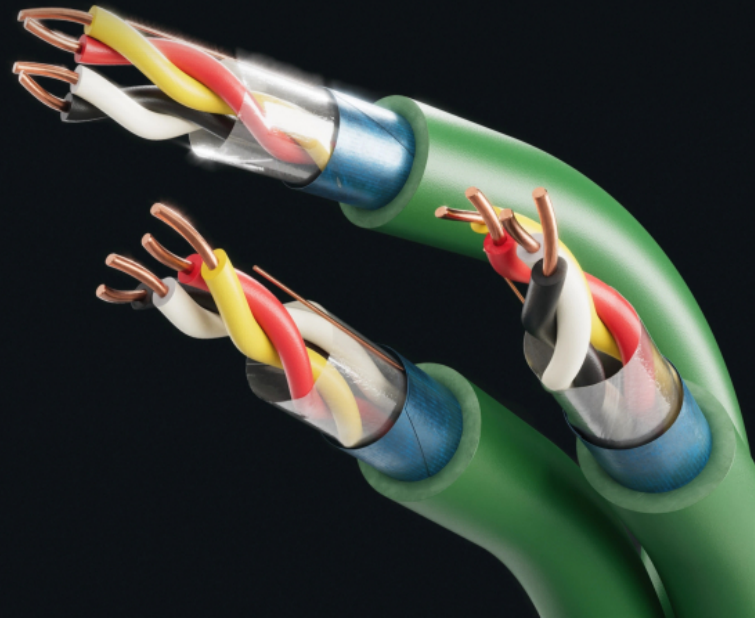

TECHNICAL DATA



Standard
adapted to DIN VDE 0815



Test Voltage
4000 Veff (core/screen)



Fire properties
CPR classification: Eca



Core identification
1st. circuite: red (a), black (b) 2nd. circuite: white (a), yellow (b)



Temperature range
Laying temperature: min. -5°C

DESIGN

Outer diameter appr. (mm)	Total weight appr. (kg/km)	Number of pairs x nominal diameter	Standard lengths/packing (m)
7,0	60	2	100 R, 500 Sp, 1000 Sp

CONTACT PERSON

Dogan Özcan
Head of Technical Department
+43 (0) 1 70170-154
dogan.oezcan@skw.at

