




JE-H(St)H...Bd FE180/E30

SiR/FRNC halogen-free installation cable with insulation integrity and circuit integrity, screened

SAFETY CABLES WITH CIRCUIT INTEGRITY

Measuring and control cable providing functional integrity in the event of fire.
Not designed for laying in earth or water. Not UV and water resistant.

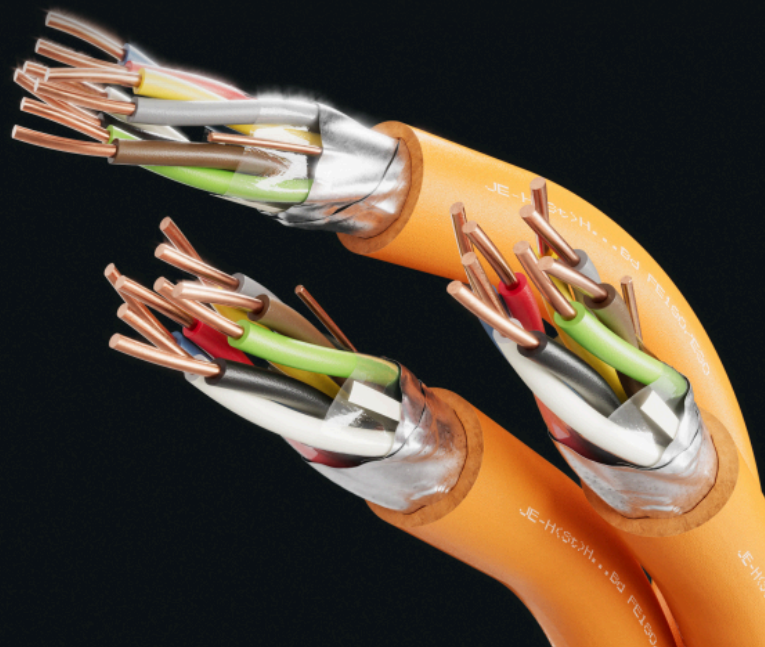

TECHNICAL DATA



Standard
adapted to DIN VDE 0815



Certificate
VDE Germany



Test Voltage
core/core 500 V / 50 Hz
core/screen 2000 V / 50 Hz



Rated Voltage
max. 225 Vss



Bending radius (min.)
7,5 x Ø of cable



Fire properties
EN 60332-1-2: self-extinguishing
EN 60754-2: halogen-free, non-corrosive combustion gases
EN 61034-2: low smoke emission
EN 60332-3-22: reduced flame propagation
DIN 4102-12: circuit integrity



Core identification
DIN VDE 0815



Temperature range
Laying temperature: min. -5°C
Operating temperature: -30°C up to 70°C

DESIGN



- 1 Copper conductor, round solid (RE)
- 2 Core insulation (silicone rubber), cores pair stranded, marking with green thread
- 3 Inner covering (plastic tape)
- 4 Screen (plastic laminated aluminium tape with drain wire)
- 5 Sheath (halogen-free polymer compound, orange)

Electrical parameters

Loop resistance max	Ω/km	73.2
Mutual capacitance, max.	nF/km	120
Capacitance unbalance, max. k	pF/500m	400
Conductor diameter	mm	0.8
Insulation resistance, min. at 20 °C	MΩ/km	100
Mutual capacitance (approx. value), at 800 Hz	nF/km	144

Number of pairs x nominal diameter	Outer diameter appr. (mm)	Total weight appr. (kg/km)
1 x 2 x 0.8	7.1	62
2 x 2 x 0.8	7.9	84
4 x 2 x 0.8	11.1	138
8 x 2 x 0.8	13.7	224
12 x 2 x 0.8	16.1	305
16 x 2 x 0.8	18.1	384
20 x 2 x 0.8	20.3	480
32 x 2 x 0.8	25.1	733
52 x 2 x 0.8	30.8	1106

CONTACT PERSON

Dogan Özcan
 Head of Technical Department
 +43 (0) 1 70170-154
 dogan.oezcan@skw.at

