



We Make
Modern Life
Possible




F-2YJA2Y

Telecommunication underground cable, screened,
longitudinally water-proof

TELECOMMUNICATIONS CABLES

Underground cable for use in telecommunications installations and related installations. Suitable for installation under ground, in water, cable ducts etc.

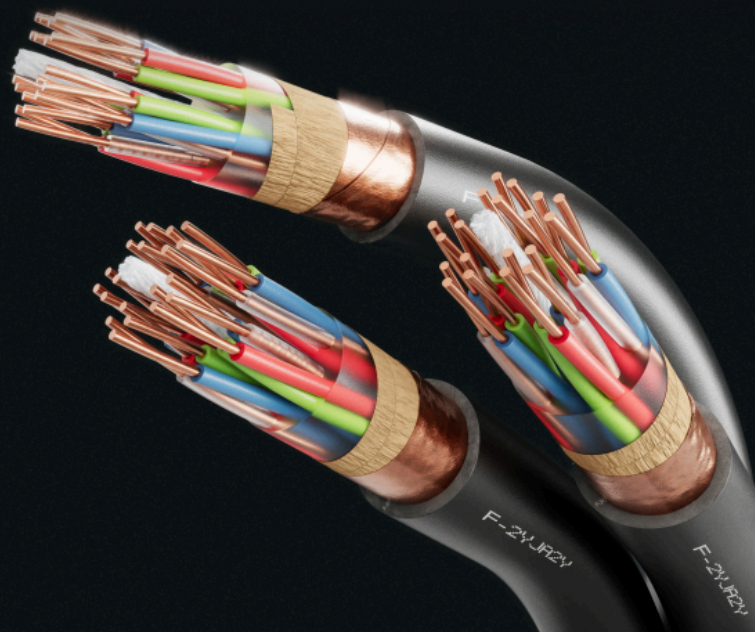

TECHNICAL DATA



Standard
adapted to Telekom Austria-Standard



Test Voltage
2 kV (core/screen)



Rated Voltage
max. 200 Veff



Bending radius (min.)
10 x Ø des Kabels



Fire properties
CPR-Klassifizierung: Fca



Core identification
Colour code with trace quad in each layer (TA standard)



Temperature range
Laying temperature: min. -20°C
Conductor temperature: max. 80°C
Fixed installation: -20°C up to 50°C
Flexible use: -20°C up to 70°C

DESIGN



Electrical parameters

Conductor diameter	mm	0.6	0.8
Conductor resistance, max. at 20 °C	Ω/km	130	73.2
Insulation resistance, min. at 20 °C	MΩ/km	5000	5000
Mutual capacitance (approx. value), at 800 Hz	nF/km	50	50

Number of pairs x nominal diameter	Outer diameter appr. (mm)	Total weight appr. (kg/km)	Standard lengths/packing (m)
6 x 2 x 0.6	10.7	122	500 T, 1000 T
10 x 2 x 0.6	12.1	165	500 T, 1000 T
20 x 2 x 0.6	17	319	500 T, 1000 T
30 x 2 x 0.6	17.9	391	500 T, 1000 T
40 x 2 x 0.6	19.4	481	500 T, 1000 T
50 x 2 x 0.6	21.1	582	500 T, 1000 T
60 x 2 x 0.6	22.2	664	500 T, 1000 T
80 x 2 x 0.6	29	978	500 T, 1000 T
100 x 2 x 0.6	31.1	1162	500 T, 1000 T
6 x 2 x 0.8	12.1	165	500 T, 1000 T
10 x 2 x 0.8	13.8	232	500 T, 1000 T
20 x 2 x 0.8	19.8	267	500 T, 1000 T
30 x 2 x 0.8	20.9	586	500 T, 1000 T
40 x 2 x 0.8	22.8	730	500 T, 1000 T
50 x 2 x 0.8	25.3	905	500 T, 1000 T
60 x 2 x 0.8	31	1114	500 T, 1000 T
80 x 2 x 0.8	34	1470	500 T, 1000 T
100 x 2 x 0.8	37	1840	500 T, 1000 T

CONTACT PERSON

Dogan Özcan
Head of Technical Department
+43 (0) 1 70170-154
dogan.oezcan@skw.at

