




JB-H(St)H...Bd

Fire alarm cable, halogen-free, screened

HALOGEN-FREE TELECOMMUNICATION, FIRE SIGNALING AND ELECTRONIC CABLES

For use in fire alarm systems. Preferably for indoor applications but also for permanent outdoor installation under protection against solar radiation. Not usable as power cable and/or in earth.

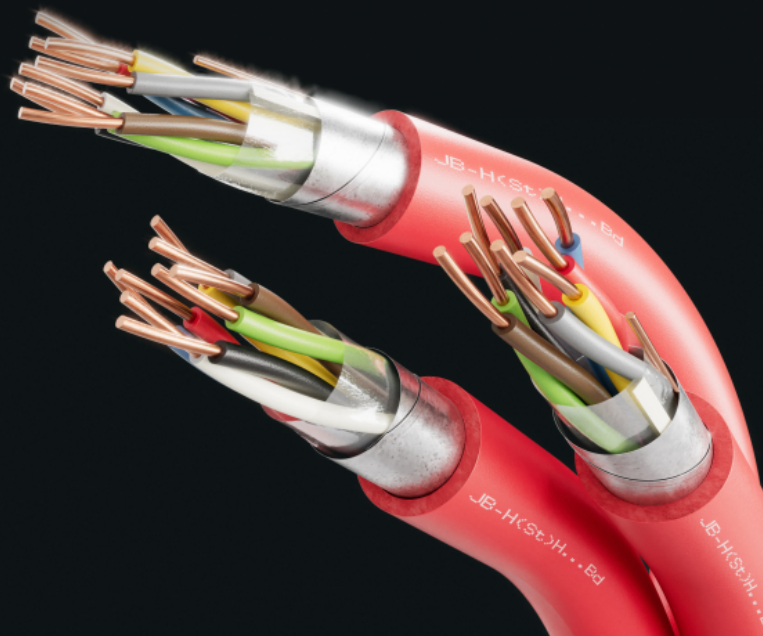

TECHNICAL DATA



Standard
adapted to DIN VDE 0815



Test Voltage
800 V_{eff} (core/screen)



Rated Voltage
max. 300 V



Bending radius (min.)
7,5 x Ø der Leitung



Fire properties
EN 61034-2: low smoke emission



Core identification
DIN VDE 0815



Temperature range
Laying temperature: min. -5°C
Fixed installation: -30°C up to 70°C
Flexible use: -5°C up to 50°C

DESIGN



Electrical parameters

Conductor diameter	mm	0.8
Loop resistance max	Ω/km	73.2
Insulation resistance, min. at 20 °C	MΩ/km	100
Mutual capacitance (approx. value), at 800 Hz	nF/km	144
Mutual capacitance, max.	nF/km	120
Capacitance unbalance k9 (pairs), max. at 800 Hz (80 % values)	pF/km	200
Capacitance unbalance k9 (pairs), max. at 800 Hz (100 % of values)	pF/km	300

Number of pairs x nominal diameter	Outer diameter appr. (mm)	Total weight appr. (kg/km)	Standard lengths/packing (m)
1 x 2 x 0.8	5.4	37	500 T, 1000 T
2 x 2 x 0.8	5.9	52	500 T, 1000 T
4 x 2 x 0.8	11	152	500 T, 1000 T
6 x 2 x 0.8	11.5	152	500 T, 1000 T
10 x 2 x 0.8	13.5	214	500 T, 1000 T
20 x 2 x 0.8	16	336	500 T, 1000 T
30 x 2 x 0.8	19.5	490	500 T, 1000 T
40 x 2 x 0.8	22	625	500 T, 1000 T
50 x 2 x 0.8	25	788	500 T, 1000 T
60 x 2 x 0.8	27	924	500 T, 1000 T
80 x 2 x 0.8	30.5	1218	500 T, 1000 T
100 x 2 x 0.8	34	1500	500 T, 1000 T

CONTACT PERSON

Dogan Özcan
 Head of Technical Department
 +43 (0) 1 70170-154
 dogan.oezcan@skw.at

