




(N)HXCH FE180/E90

SiR/FRNC halogen-free energy cable with insulation integrity and circuit integrity, screened

These cables are intended for the stationary distribution of electrical energy in dry or damp premises and for fixed installations in air or concrete. Suitable for hotels, hospitals, underground railways, airports etc. to protect people and technical building equipment in the event of fire if circuit integrity is required.

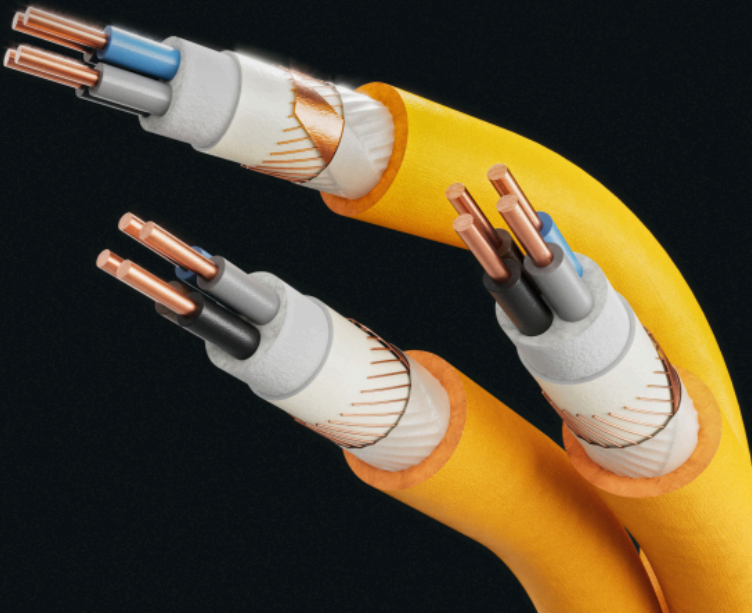

TECHNICAL DATA

 Standard adapted to DIN VDE 0266	 Bending radius (min.) 12 x Ø of cable	 Core identification HD 308 S2
 Certificate VDE Germany VDE Reg. No. 8310	 Fire properties EN 60332-1-2: flame retardant EN 60754-2: halogen-free, non-corrosive combustion gases EN IEC 60332-3-24: reduced flame propagation EN 61034-2: low smoke emission DIN VDE 0472-814: insulation integrity FE180 DIN 4102-12: circuit integrity E90	 Temperature range Laying temperature: min. -5°C Operating temperature: -50°C up to 90°C Conductor temperature: max. 90°C Short circuit temperature: max. 90°C
 Test Voltage 4 kV / 50 Hz		
 Rated Voltage 0.6/1 kV		

DESIGN



- 1 Copper conductor, round solid (RE) resp. round stranded (RM)
- 2 Primary core insulation (silicone rubber)
- 3 Secondary core insulation (silicone rubber)
- 4 Inner covering (halogen-free tape and halogen free polymer compound)
- 5 Inner sheath (halogen-free polymer compound)
- 6 Concentric screen (bare copper wires), counter helix (copper tape) and halogen-free plastic tape
- 7 Sheath (halogen-free polymer compound, orange)

Number of cores x nominal cross-section / cross-section of screen (mm ²)	Current rating in the air (A)	Outer diameter appr. (mm)	Total weight appr. (kg/km)
2 x 1.5 RE / 1.5	28	15.4	291
3 x 1.5 RE / 1.5	25	15.9	313
4 x 1.5 RE / 1.5	25	16.8	351
5 x 1.5 RE / 2.5	16	17.8	402
7 x 1.5 RE / 2.5	15.5	18.8	466
10 x 1.5 RE / 2.5	13	22.3	632
12 x 1.5 RE / 2.5	12.5	22.8	678
14 x 1.5 RE / 2.5	12	23.7	741
19 x 1.5 RE / 4	10.5	26.3	914
24 x 1.5 RE / 6	9.5	30.9	1244
30 x 1.5 RE / 6	9	32.4	1400
40 x 1.5 RE / 10	8	36.2	1767
2 x 2.5 RE / 2.5	37	16.1	339
3 x 2.5 RE / 2.5	33	16.7	372
4 x 2.5 RE / 2.5	33	17.7	420
5 x 2.5 RE / 2.5	22	18.8	473
7 x 2.5 RE / 2.5	20.5	19.9	561
10 x 2.5 RE / 4	17.5	24.4	795
12 x 2.5 RE / 4	16.5	25	856
14 x 2.5 RE / 4	16	25.9	940
16 x 2.5 RE / 2.5	15	26.5	1011
19 x 2.5 RE / 6	14	28.2	1169
24 x 2.5 RE / 10	12.5	33.8	1608
30 x 2.5 RE / 10	12	35.5	1822
40 x 2.5 RE / 10	11	39.7	2312
2 x 4 RE / 4	49	17.6	411
3 x 4 RE / 4	43	18.3	455
4 x 4 RE / 4	43	19.3	519
5 x 4 RE / 2.5	28	20	571
5 x 4 RE / 4	28	20.6	587
6 x 4 RE / 4	27.5	21.8	671
7 x 4 RE / 4	27	21.8	709
10 x 4 RE / 6	23	26.1	1002
12 x 4 RE / 6	22	26.8	1088
14 x 4 RE / 6	21	27.8	1201
19 x 4 RE / 10	18.5	32	1609
2 x 6 RE / 6	62	18.6	498
3 x 6 RE / 6	54	19.3	561
4 x 6 RE / 6	54	20.5	644
5 x 6 RE / 6	36	21.9	738
7 x 6 RE / 6	36	23.3	897
2 x 10 RE / 10	85	20.6	662
3 x 10 RE / 10	75	21.4	760
4 x 10 RE / 10	75	22.8	884
5 x 10 RE / 10	49	24.4	1026
2 x 16 RE / 16	113	22.4	881
2 x 16 RM / 16	113	22.9	908
3 x 16 RM / 16	100	23.9	1057
4 x 16 RE / 16	100	25	1210
4 x 16 RM / 16	100	25.6	1243
5 x 16 RM / 16	65	27.5	1456
2 x 25 RM / 16	152	26.3	1225



Number of cores x nominal cross-section / cross-section of screen (mm ²)	Current rating in the air (A)	Outer diameter appr. (mm)	Total weight appr. (kg/km)
3 x 25 RM / 16	136	27.6	1457
4 x 25 RM / 16	136	30.7	1819
5 x 25 RM / 16	90	33.3	2163
2 x 35 RM / 16	187	28.4	1493
3 x 35 RM / 16	165	31	1893
3 x 35 RM / 35	165	32.1	2071
4 x 35 RM / 16	165	33.4	2285
5 x 35 RM / 16	109	36.5	2746
1 x 50 RM / 25	265	21	981
2 x 50 RM / 25	228	33	2073
3 x 50 RM / 25	201	34.9	2516
4 x 50 RM / 25	201	38.4	3095
5 x 50 RM / 25	133	42	3710
1 x 70 RM / 35	336	24	1307
3 x 70 RM / 35	255	40.4	3429
4 x 70 RM / 35	255	43.9	4174
5 x 70 RM / 35	180	48	5011
1 x 95 RM / 50	415	26.2	1710
3 x 95 RM / 50	314	45.4	4567
4 x 95 RM / 50	314	49.5	5589
5 x 95 RM / 50	215	54.6	6784
1 x 120 RM / 70	485	27.6	2150
3 x 120 RM / 70	364	48.5	5615
4 x 120 RM / 70	364	53.4	6937
5 x 120 RM / 70	247	58.6	8347
3 x 150 RM / 70	416	53.5	6780
4 x 150 RM / 70	416	58.6	8347
5 x 150 RM / 70	279	64.7	10124
3 x 185 RM / 95	480	59.3	8520
4 x 185 RM / 95	480	65.3	10496
3 x 240 RM / 120	565	66.4	10929
4 x 240 RM / 120	565	72.7	13438

CONTACT PERSON

Ing. Dan Bachtík
 Product Supervisor
 +420734366090
 dan.bachtik@prakab.cz

