




LiHCH

FRNC control cable, halogen-free, screened

SAFETY CABLES WITH CIRCUIT INTEGRITY

LiHCH cables are multi-core halogen-free screened control cables suitable for indoor use in industrial applications with increased requirements for electromagnetic compatibility. Generally used in flexible or fixed applications with low mechanical and tensile stress as connecting cables for data processing, measurement and control engineering, safety related systems and as electronics cable where such cables are needed.

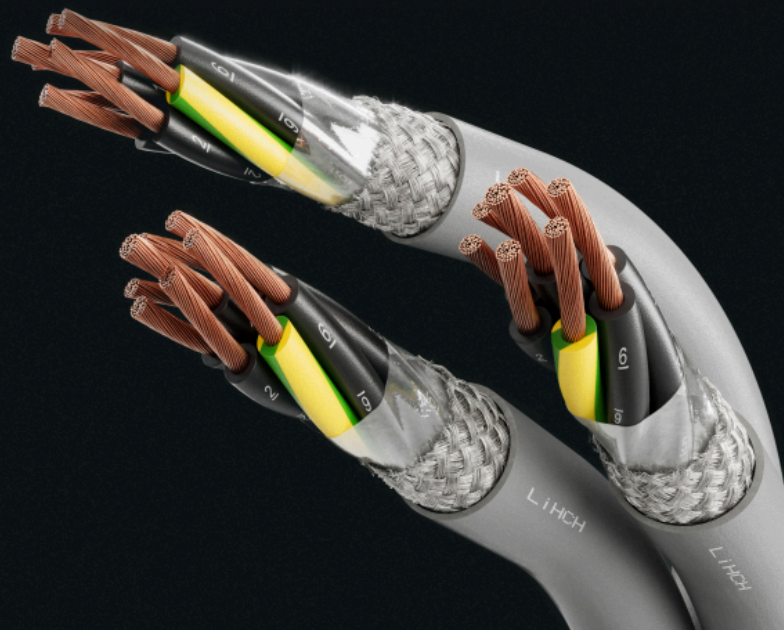

TECHNICAL DATA



Standard
based on EN 50525-3-11



Test Voltage
4000 V



Rated Voltage
300/500 V (U_o/U)



Bending radius (min.)
feste Verlegung: 4 x Ø der Leitung
flexible Verlegung: 15 x Ø der Leitung



Fire properties
CPR classification: Dca



Core identification
black (continuously numbered), from 3 cores with green/yellow ground conductor



Temperature range
Fixed installation: -40°C up to 70°C
Flexible use: -5°C up to 70°C

DESIGN



Number of cores x nominal cross-section (mm ²)	Max. conductor resistance (Ω/km)	Outer diameter appr. (mm)	Total weight appr. (kg/km)
2 x 0,5	39	5.9	46
2 x 1	19.5	6.3	59
2 x 1,5	13.3	7.2	79
3 G 1,5	13.3	7.6	95
4 G 1	19.5	7.5	94
4 G 2,5	7.98	10	179
4 G 4	4.95	11.7	260
4 G 6	3.3	14.3	401
4 G 10	1.91	17.6	613
5 G 0,5	39	7	80
5 G 2,5	7.98	11	927
5 G 10	1.91	19.4	767
6 G 1,5	13.3	9.9	176
6 G 4	4.95	14.4	388
6 G 6	3.3	17.1	562
7 G 2,5	7.98	12.3	289
8 G 0,5	39	9.1	133
12 G 0,5	39	10	160
14 G 2,5	7.98	16.9	552
18 G 0,5	39	11.6	222
64 G 1,5	13.3	27.4	1482

CONTACT PERSON

Dogan Özcan
 Head of Technical Department
 +43 (0) 1 70170-154
 dogan.oezcan@skw.at

