



We Make
Modern Life
Possible



N2XS(F)2Y 18/30 kV

XLPE/HDPE medium voltage underground cable,
longitudinally water-proof

COPPER – VDE

For fixed installation for high requirements in the ground subject to external effects of moisture, in the open air and in cable ducts for industrial and distribution mains – as permitted by the local building regulations – under severe mechanical stressing during installation and operation.



TECHNICAL DATA



Standard
DIN VDE 0276–620



Certificate
VDE Germany



Test Voltage
48 kV



Rated Voltage
18/30 kV (U₀/U)




Bending radius (min.)
15 x Ø of cable



Temperature range
Laying temperature: min. -20°C
Operating temperature: -20°C up to 80°C
Conductor temperature: max. 90°C
Short circuit temperature: max. 250°C

DESIGN

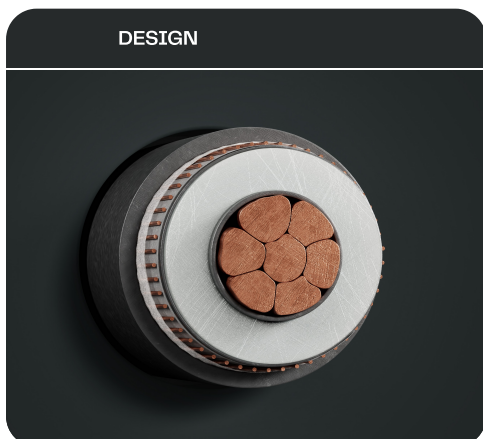

Number of cores x nominal cross-section / cross-section of screen (mm ²)	Mutual capacitance (nF/km)	Max. conductor resistance (Ω/km)	Current rating in the earth (A)	Current rating in the air (A)	Outer diameter appr. (mm)	Total weight appr. (kg/km)	Standard lengths/packing (m)
1 x 50 RM / 16	0.14	0.387	225	241	36	1520	500 T, 1000 T
1 x 70 RM / 16	0.15	0.268	274	299	38	1790	500 T, 1000 T
1 x 95 RM / 16	0.17	0.193	327	363	40	2070	500 T, 1000 T
1 x 120 RM / 16	0.18	0.153	371	418	41	2360	500 T, 1000 T
1 x 150 RM / 25	0.19	0.124	414	472	42	2760	500 T, 1000 T
1 x 185 RM / 25	0.21	0.0991	466	539	44	3170	500 T, 1000 T
1 x 240 RM / 25	0.23	0.754	539	635	47	3860	500 T, 1000 T
1 x 300 RM / 25	0.25	0.601	606	725	49	4490	500 T, 1000 T
1 x 400 RM / 35	0.27	0.047	680	831	52	5580	500 T, 1000 T
1 x 500 RM / 35	0.3	0.0366	765	953	55	6600	500 T, 1000 T
1 x 630 RM / 35	0.33	0.0283	841	1094	58	7850	500 T, 1000 T
1 x 800 RM / 35	0.36	0.0221	990	1238	62	9350	500 T, 1000 T

CONTACT PERSON**Dogan Özcan**

Head of Technical Department

+43 (0) 1 70170-154

dogan.oezcan@skw.at

