



TCEPKPFLEZE

PE/PE ground telecommunication cables,
screened, armoured

The cables are waterproof, with a low reduction factor and are designed for external telecommunications and data networks, stored in the ground, cable ducts or pipes. Cables are also applicable to various types of transmission systems including ADSL2 + and VDSL2.



TECHNICAL DATA



Standard

TP PRAKAB 08/97
ČSN EN 60708



Certificate

EZÚ Czech Republic



Test Voltage

core/core 500 V / 50 Hz
core/screen 1000 V / 50 Hz



Rated Voltage

250 V



Bending radius (min.)

10 x ϕ of cable



Core identification


ČSN EN 60708



Temperature range

Laying temperature: min. -10°C
Operating temperature: -40°C up to 70°C

DESIGN

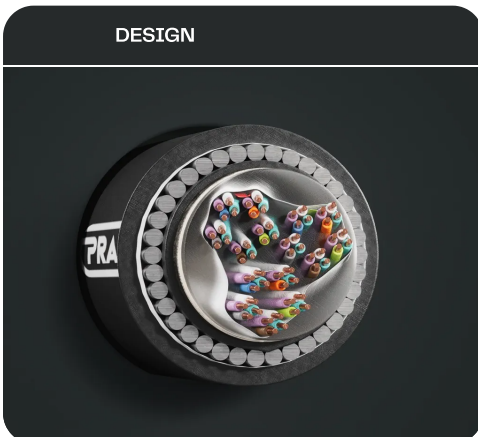

- 1 Copper conductor, round solid (RE)
- 2 Core insulation (foam skin PE), cores star quaded and quads stranded in groups, core stranding petrol jelly filled
- 3 Inner covering (paper tape)
- 4 Screen (PE Al PE tape)
- 5 Sheath (PE, black)
- 6 Armouring (Al wires)
- 7 Sheath (PE black, UV-resistant)

Electrical parameters		
Loop resistance, max. at 20 °C	Ω/km	< 74
Insulation resistance, min. / tested	GΩ/km	1.5 / 10
Mutual capacitance, max. average	nF/km	42
Mutual capacitance, max. single	nF/km	49
Attenuation at 16 kHz, max.	dB/km	3
Attenuation at 80 kHz, max.	dB/km	5
Capacitance unbalanced, max. k1	pF/500 m	160
Conductor diameter	mm	0.8

Number of elements x element x conductor diameter	Outer diameter appr. (mm)	Total weight appr. (kg/km)
3 x 4 x 0.8	23.7	614
5 x 4 x 0.8	25.8	740
10 x 4 x 0.8	30.0	1035
15 x 4 x 0.8	32.6	1241
20 x 4 x 0.8	35.2	1470
25 x 4 x 0.8	37.9	1695
35 x 4 x 0.8	41.8	2098
50 x 4 x 0.8	47.3	2705

CONTACT PERSON

Jan Pietroň
Key Account Manager
+420 604 471 907
jan.pietron@koneka.cz

