



H05RR-F (GML)

Light rubber flexible cable

RUBBER CABLES


For use with light to moderate mechanical stressing in households and office premises for light electrical equipment. Not suitable for continuous use in the open air or for use in premises used industrially.



TECHNICAL DATA

 <p>Standard EN 50525-2-21</p>	 <p>Rated Voltage 300/500 V (U₀/U)</p>	 <p>Core identification HD 308 S2</p>
 <p>Certificate VDE Germany</p>	 <p>Bending radius (min.) 4 x Ø der Leitung</p>	 <p>Temperature range Laying temperature: min. -25°C Operating temperature: -25°C up to 50°C Conductor temperature: max. 60°C Short circuit temperature: max. 200°C</p>
 <p>Test Voltage 2 kV</p>	 <p>Fire properties OPR-Klassifizierung: Fca</p>	

DESIGN

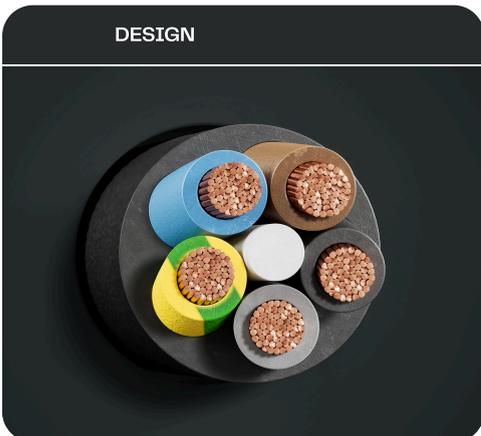

Number of cores x nominal cross-section (mm ²)	Max. conductor resistance (Ω/km)	Outer diameter appr. (mm)	Total weight appr. (kg/km)	Standard lengths/packing (m)
2 x 0,75	26.7	7.0	61	500 Sp, 1000 Sp
3 x 0,75	26.7	7.5	74	100 R, 500 Sp, 1000 Sp
4 x 0,75	26.7	8.0	90	500 Sp, 1000 Sp
5 x 0,75	26.7	8.5	110	500 Sp, 1000 Sp
2 x 1	20.0	7.7	71	500 Sp, 1000 Sp
3 G 1	20.0	8.0	83	100 R, 500 Sp, 1000 Sp
4 G 1	20.0	8.5	105	500 Sp, 1000 Sp
5 G 1	20.0	9.5	140	500 Sp, 1000 Sp
2 x 1,5	13.7	8.5	110	500 Sp, 1000 Sp
3 G 1,5	13.7	9.0	125	100 R, 500 Sp, 1000 Sp
4 G 1,5	13.7	10.0	160	100 R, 500 Sp, 1000 Sp
5 G 1,5	13.7	11.5	195	100 R, 500 Sp, 1000 Sp
2 x 2,5	8.2	10.5	150	100 R, 500 Sp, 1000 Sp
3 G 2,5	8.2	11.0	180	100 R, 500 Sp, 1000 Sp
4 G 2,5	8.2	12.0	240	100 R, 500 Sp, 1000 Sp
5 G 2,5	8.2	13.0	290	100 R, 500 Sp, 1000 Sp

CONTACT PERSON

Dogan Özcan
Head of Technical Department
+43 (0) 1 70170-154
dogan.oezcan@skw.at

