



We Make
Modern Life
Possible



FLEXICS® TRUCK FLRY11Y

PVC/PUR power and control cable for commercial vehicles

COMMERCIAL VEHICLES AND EVC CABLES


These PUR sheathed cables provide optimal solution for connection between towing and towed vehicles. Due to PUR sheath cables offer high resistance to abrasion. Can be produced as SPIRAL for processing into coiled cable assemblies. ADR approval allows use in vehicles transporting hazardous goods.



TECHNICAL DATA

 <p>Standard Acc. to ISO 6722-1 and ISO 14572 / temperature class A</p>	 <p>Rated Voltage 60 V (U₀/U)</p>	 <p>Core identification Acc. to ISO 4141-3, colour coded or continuously numbered, according to internal standards or client's requirements</p>
 <p>Certificate ADR TÜ . EGG . 269 - 18</p>	 <p>Bending radius (min.) 12 x Ø of cable</p>	 <p>Temperature range Operating temperature: -40°C up to 85°C</p>
 <p>Test Voltage 5000 V / 50Hz</p>	 <p>Fire properties ISO 6722-1, ISO 14572, ISO 4141</p>	

DESIGN

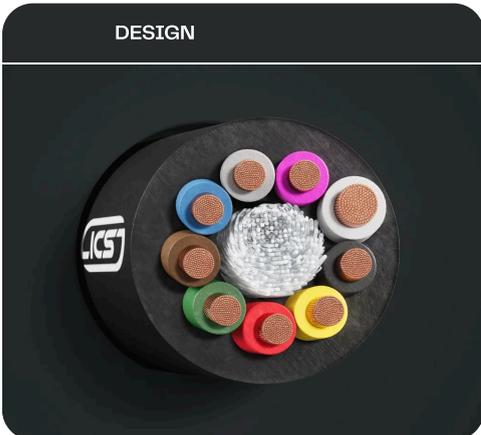

- 1 Bare copper conductors, fine wires according to ISO 6722-1
- 2 Core insulation of special compound based on polyvinyl chloride (PVC) or for data transmission core / control pairs based on modified polyolefins (MPO), thin wall insulation according to ISO 6722-1
- 3 Power supply cores stranded together with control cores and construction-related fillers (optional)
- 4 Mineral powder separation or non-woven wrapping over stranding (optional)
- 5 Outer sheath of special compound based on polyurethane (PUR), colour: black (RAL 9005) or according to customer's requirements



Number of cores x nominal cross-section (mm ²)	Outer diameter appr. (mm)	Cu-value (kg/km)	Total weight appr. (kg/km)
2 x 0.5	5.0	9.6	37
7 x 0.75	7.3	50.4	79
2 x 1	6.0	19.2	55
3 x 1	6.3	28.8	67
4 x 1	6.8	38.4	81
5 x 1	7.5	48	97
5 x 1 + 1 x 2.5	9.0	72	133
6 x 1 + 1 x 1.5	8.3	72	187
2 x 1.5	6.6	28.8	68
2 x 1.5 + 2 x 0.75	7.2	43.2	85
3 x 1.5 + 2 x 4	11.6	120	197
3 x 1.5 + 2 x 6	12.1	158.4	275
6 x 1.5 + 1 x 2.5	10.3	110.4	187
7 x 1.5	8.9	100.8	166
8 x 1.5 + 1 x 2.5	11.7	139.2	239
10 x 1.5 + 3 x 2.5 + (2 x 1.5)	14.4	244.8	395
10 x 1.5 + 3 x 2.5	14.4	216	367
18 x 1.5	13.7	259.2	407
25 x 1.5	16.1	360	560
50 x 1.5	23.4	720	998
2 x 4 + 3 x 1.5 + (2 x 1.5)	11.9	148.8	257
2 x 6 + 3 x 1.5 + (2 x 1.5)	12.1	187.2	321

**CONTACT PERSON**

Dipl. Ing. Peter Tomka
+421 37 6969631
peter.tomka@ics-cables.sk

