



We Make  
Modern Life  
Possible




## N2XSY 12/20 kV

XLPE/PVC medium voltage underground cable, single core

COPPER - VDE

For fix installation in ground, in indoors, ground and in cable ducts for industry and distribution networks in accordance with the applicable installation regulations.

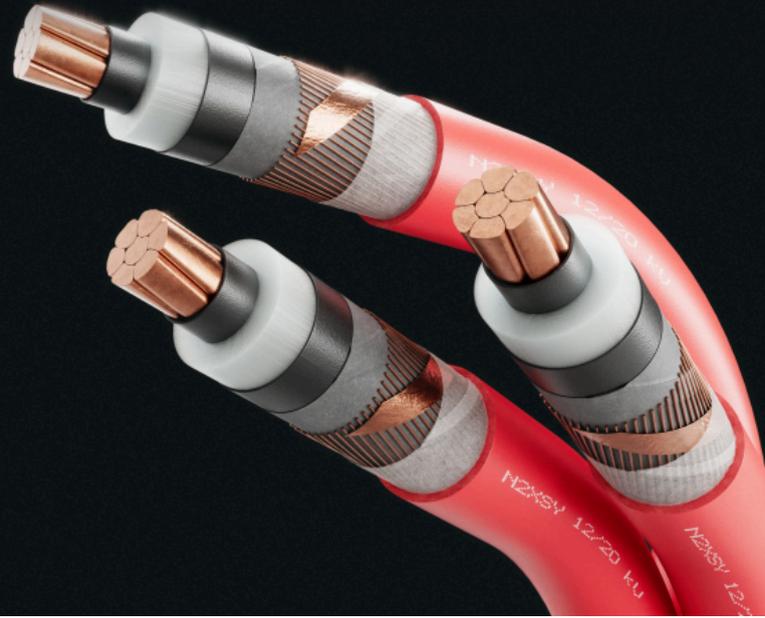

### TECHNICAL DATA



**Standard**  
DIN VDE 0276-620



**Certificate**  
VDE Germany



**Test Voltage**  
36 kV



**Rated Voltage**  
12/20 kV (U<sub>0</sub>/U)



**Bending radius (min.)**  
15 x  $\varnothing$  of cable



**Fire properties**  
EN 60332-1-2: flame retardant



**Temperature range**  
Laying temperature: min. -5°C  
Operating temperature: -20°C up to 80°C  
Conductor temperature: max. 90°C  
Short circuit temperature: max. 250°C

### DESIGN



Number of cores x nominal cross-section / cross-section of screen (mm <sup>2</sup> )	Mutual capacitance (nF/km)	Max. conductor resistance (Ω/km)	Current rating in the earth (A)	Current rating in the air (A)	Outer diameter appr. (mm)	Total weight appr. (kg/km)	Standard lengths/packing (m)
1 x 35 RM / 16	0.16	0.524	189	200	29.0	1100	500 T, 1000 T
1 x 50 RM / 16	0.18	0.387	222	239	30.0	1250	500 T, 1000 T
1 x 70 RM / 16	0.2	0.268	271	297	32.0	1350	500 T, 1000 T
1 x 95 RM / 16	0.22	0.193	323	361	33.0	1750	500 T, 1000 T
1 x 120 RM / 16	0.24	0.153	367	416	35.0	1900	500 T, 1000 T
1 x 150 RM / 25	0.26	0.124	409	470	36.0	2400	500 T, 1000 T
1 x 185 RM / 25	0.27	0.099	461	538	38.0	2800	500 T, 1000 T
1 x 240 RM / 25	0.31	0.075	532	634	41.0	3400	500 T, 1000 T
1 x 300 RM / 25	0.33	0.060	599	724	43.0	4000	500 T, 1000 T
1 x 400 RM / 35	0.37	0.047	671	829	46.0	4950	500 T, 1000 T
1 x 500 RM / 35	0.41	0.037	754	953	49.0	6050	500 T, 1000 T

**CONTACT PERSON**

**Dogan Özcan**  
Head of Technical Department  
+43 (0) 1 70170-154  
dogan.oezcan@skw.at

