



We Make  
Modern Life  
Possible




# A-2YF(L)2Y...St III Bd

Telecommunication underground cable, screened,  
longitudinally water-proof

TELECOMMUNICATIONS CABLES


Underground cable for use in telecommunications installations and related installations. Suitable for installation under ground, in water, cable ducts etc.

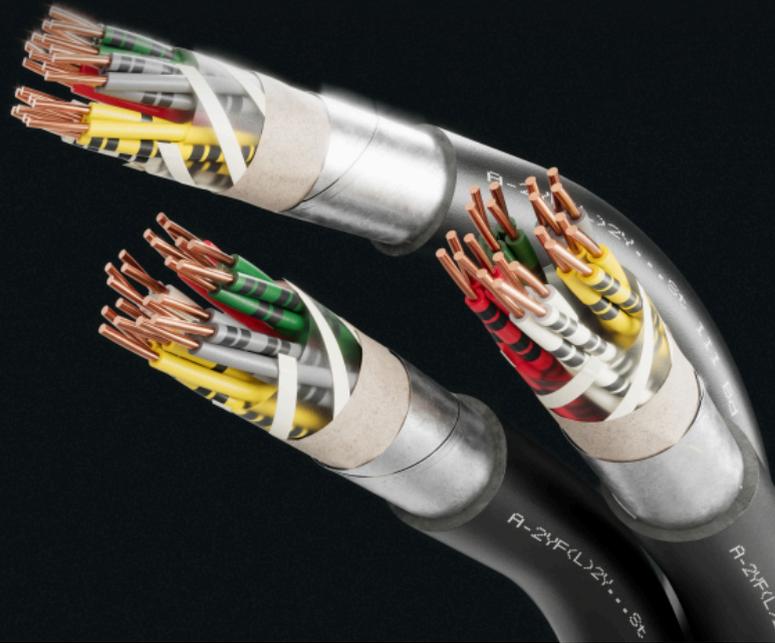

## TECHNICAL DATA

- |  |  |  |
|--|--|--|
|  <p><b>Standard</b><br/>DIN VDE 0816</p>           |  <p><b>Rated Voltage</b><br/>225 Veff (peak value)</p>      |  <p><b>Core identification</b><br/>DIN VDE 0816</p>   |
|  <p><b>Certificate</b><br/>VDE Germany</p>         |  <p><b>Bending radius (min.)</b><br/>10 x Ø des Kabels</p>  |  <p><b>Temperature range</b><br/>Laying temperature: min. -20°C<br/>Fixed installation: -20°C up to 70°C<br/>Flexible use: -20°C up to 50°C</p> |
|  <p><b>Test Voltage</b><br/>2 kV (core/screen)</p> |  <p><b>Fire properties</b><br/>OPR-Klassifizierung: Fca</p> |  |

## DESIGN

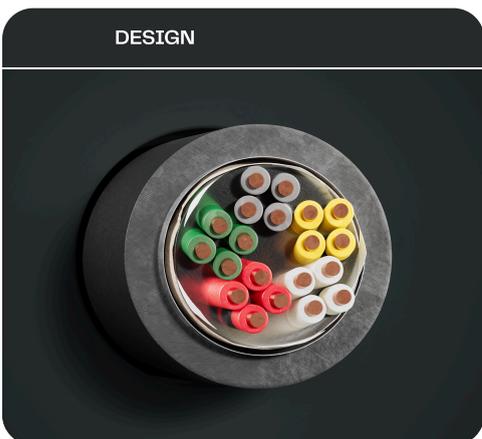

## Electrical parameters

Conductor diameter	mm	0.6	0.8
Conductor resistance, max. at 20 °C	Ω/km	130	73.2
Insulation resistance, min. at 20 °C	MΩ/km	1500	1500
Mutual capacitance (approx. value), at 800 Hz	nF/km	48	50

Number of pairs x nominal diameter	Outer diameter appr. (mm)	Total weight appr. (kg/km)	Standard lengths/packing (m)
2 x 2 x 0.6	8.0	80	500 T, 1000 T
6 x 2 x 0.6	10.8	124	500 T, 1000 T
10 x 2 x 0.6	12.6	173	500 T, 1000 T
20 x 2 x 0.6	16.3	291	500 T, 1000 T
30 x 2 x 0.6	18.5	406	500 T, 1000 T
40 x 2 x 0.6	20.9	495	500 T, 1000 T
50 x 2 x 0.6	22.5	604	500 T, 1000 T
70 x 2 x 0.6	25.0	787	500 T, 1000 T
100 x 2 x 0.6	30.0	1143	500 T, 1000 T
200 x 2 x 0.6	42.0	2193	500 T, 1000 T
2 x 2 x 0.8	9.5	89	500 T, 1000 T
4 x 2 x 0.8	12.0	146	500 T, 1000 T
6 x 2 x 0.8	12.5	171	500 T, 1000 T
10 x 2 x 0.8	15.0	253	500 T, 1000 T
20 x 2 x 0.8	149.5	446	500 T, 1000 T
30 x 2 x 0.8	22.5	615	500 T, 1000 T
40 x 2 x 0.8	25.5	821	500 T, 1000 T
50 x 2 x 0.8	28.0	988	500 T, 1000 T
70 x 2 x 0.8	31.0	1283	500 T, 1000 T
100 x 2 x 0.8	37.0	1843	500 T, 1000 T
200 x 2 x 0.8	52.4	3652	500 T, 1000 T

## CONTACT PERSON

**Dogan Özcan**  
Head of Technical Department  
+43 (0) 1 70170-154  
dogan.oezcan@skw.at

