



We Make
Modern Life
Possible




J-Y(St)Y EIB BUS

Motor power supply cable for EIB-Bus, halogen-free, screened

CONTROL AND ELECTRONICS CABLES

For installation on and under plaster in dry, damp and wet locations, as a BUS cable (EIB installation bus) and as a measuring and control cable in power installations.

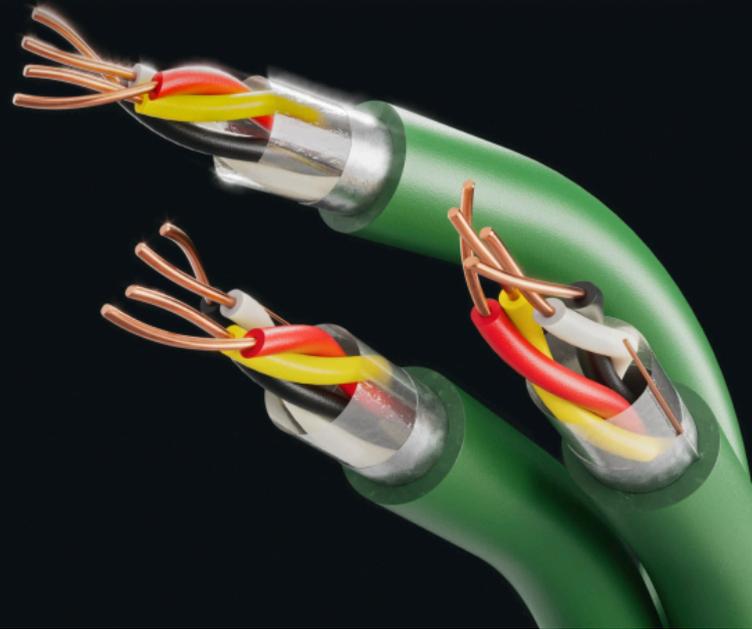

TECHNICAL DATA

- 

Standard
adapted to DIN VDE 0815



Core identification
1st. circuite: red (a), black (b) 2nd. circuite: white (a), yellow (b)
- 

Test Voltage
4 kV/50 Hz (core/screen)



Temperature range
Laying temperature: min. -5°C
Conductor temperature: max. 70°C
- 

Fire properties
CPR classification: Eca

DESIGN



Outer diameter appr. (mm)	Total weight appr. (kg/km)	Number of cores x conductor diameter	Standard lengths/packing (m)
6,2	64	2 x 0.8	50 R, 100 R, 500 Sp, 1000 Sp

CONTACT PERSON

Dogan Özcan
Head of Technical Department
+43 (0) 1 70170-154
dogan.oezcan@skw.at

