




AT-N07V3V3-F K35

PVC building site cable, cold resistant

BUILDING SITE CABLES

Our building site cables AT-N07V3V3-F have been designed for medium and heavy mechanical stress in dry, damp and wet rooms, as well as for outdoor applications and in explosion hazardous areas, where they are used to connect machines and temporary solutions.

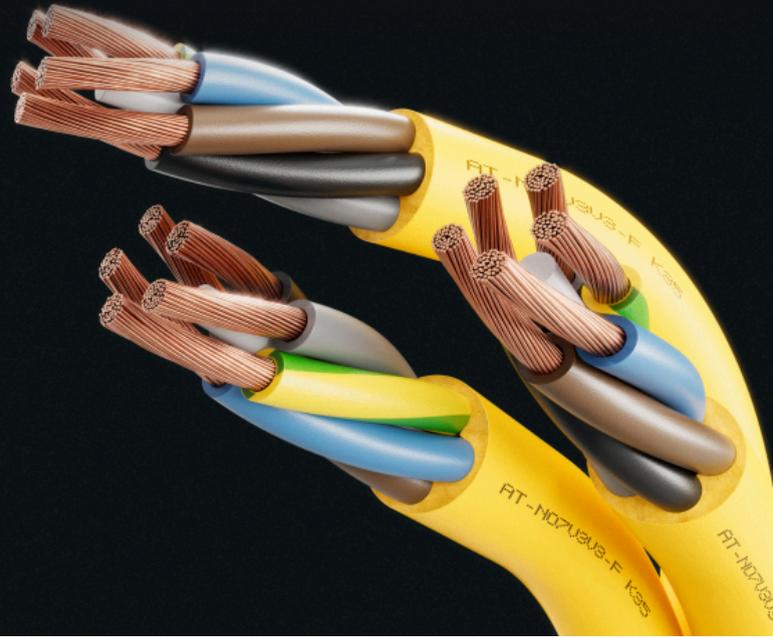

TECHNICAL DATA



Standard
ÖVE/ÖNORM E 8241-55



Test Voltage
2.5 kV / 50 Hz



Rated Voltage
450/750 V (Uo/U)



Bending radius (min.)
3 x \varnothing of cable (fixed installed)
6 x \varnothing of cable (free motion)



Fire properties
EN 60332-1-2: flame retardant
CPR classification: Eca



Core identification
colours according to GENELEC HD 308 S2



Temperature range
Laying temperature: min. -40°C
Conductor temperature: max. 60°C
Short circuit temperature: max. 150°C
Fixed installation: -40°C up to 70°C
Flexible use: -35°C up to 70°C

DESIGN



- 1 Copper conductor, fine wire
- 2 Core insulation (PVC), cores stranded in layers
- 3 Sheath (PVC yellow, cold and oil resistant); printing according to customer specification possible

Number of cores x nominal cross-section (mm ²)	Max. conductor resistance (Ω/km)	Outer diameter appr. (mm)	Total weight appr. (kg/km)
3 G 1,5	13.3	11.9	134
4 G 1,5	13.3	13.1	174
5 G 1,5	13.3	14.7	211
3 G 2,5	7.98	14.0	199
5 G 2,5	7.98	14.7	308
5 G 4	4.95	19.9	436
5 G 6	3.3	22.2	592
5 G 10	1.91	29.1	1042
5 G 16	1.21	33.3	1435

CONTACT PERSON

Dogan Özcan
Head of Technical Department
+43 (0) 1 70170-154
dogan.oezcan@skw.at

