



We Make
Modern Life
Possible




FLEXICS® CHAIN 11 UL/c(UL)

UL recognized PVC/PUR drag chain cable,
unscreened

AUTOMATION AND MOTOR SUPPLY CABLES

Extremely flexible PVC/PUR control cable for transmission of instrumentation and control signals for machine building and plant construction purposes, especially for continuous moving machine parts, e.g. within C-tracks. FLEXICS® CHAIN 11 UL/c(UL) cables are designed for both indoor and outdoor applications when exposed to high mechanical stress. Resistant against a wide range of oils, greases, coolants and lubricants.

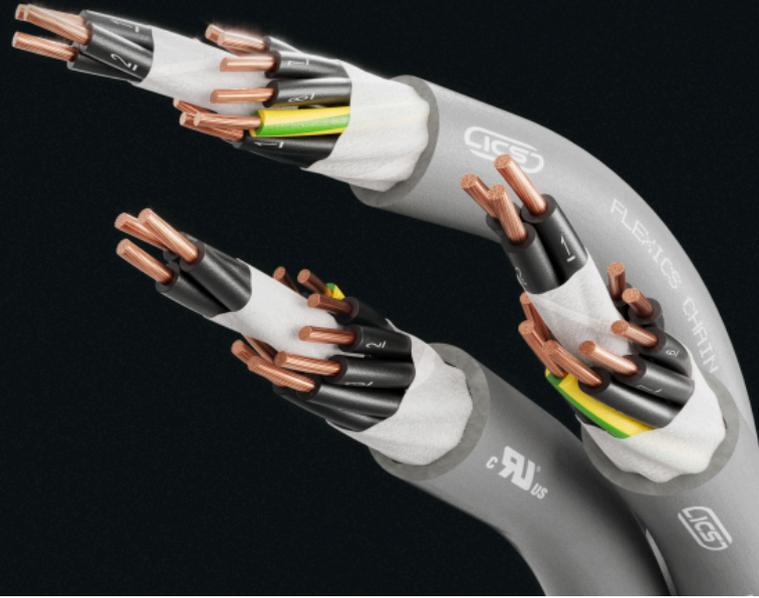

TECHNICAL DATA



Standard

Based on VDE 0285



Certificate

UL AWM Style 20234
CSA C22.2 No. 210-11, AWM



Test Voltage

4000 V / 50 Hz



Rated Voltage

300/500 V (U_o/U)
1000 V (UL/CSA)



Bending cycles

5 million



Bending radius (min.)

Fixed installation: 7.5 x ϕ of cable
Flexible use: 10 x ϕ of cable



Fire properties

EN 60332-1-2: self-extinguishing and
flame retardant
UL: vertical flame test VW-1, cable flame
test
CSA: FT1



Core identification

Black (continuously numbered), from 3
cores with green/yellow ground
conductor



Temperature range

Fixed installation: -30°C up to 80°C
Flexible use: -5°C up to 70°C

DESIGN



- 1 Bare copper conductors, super fine wires class 6 according to DIN EN 60228 / VDE 0295 / IEC 60228
- 2 Core insulation of special compound based on polyvinyl chloride (PVC)
- 3 Cores stranded in layers with short lay-lengths
- 4 Non-woven wrapping over each stranding layer
- 5 Special polyurethane (PUR) outer sheath, colour: grey (RAL 7001)

Number of cores x nominal cross-section (mm ²)	Outer diameter appr. (mm)	Cu-value (kg/km)	Total weight appr. (kg/km)
2 x 0.5	6.5	9.7	46
3 G 0.5	6.8	14.4	55
4 G 0.5	7.5	19	69
5 G 0.5	8.0	24	85
7 G 0.5	9.8	33.6	117
12 G 0.5	10.8	58	155
18 G 0.5	12.7	86	224
25 G 0.5	15.2	120	328
2 x 0.75	6.8	14.4	54
3 G 0.75	7.3	21.6	66
4 G 0.75	8.0	29	82
5 G 0.75	8.7	36	101
7 G 0.75	10.7	50	142
12 G 0.75	11.7	86	196
18 G 0.75	13.9	130	282
25 G 0.75	16.6	180	404
2 x 1	7.1	19.2	60
3 G 1	7.7	29	75
4 G 1	8.5	38.4	94
5 G 1	9.2	48	117
7 G 1	11.4	67	168
12 G 1	12.6	115	231
18 G 1	15.1	173	343
25 G 1	18.4	240	538
2 x 1.5	7.7	28.8	78
3 G 1.5	8.4	43	98
4 G 1.5	9.3	58	125
5 G 1.5	10.1	72	151
7 G 1.5	11.9	101	221
12 G 1.5	13.9	173	318
18 G 1.5	16.9	259	484
25 G 1.5	20.1	360	671
3 G 2.5	9.3	72	134
4 G 2.5	10.3	96	170
5 G 2.5	11.3	120	205
7 G 2.5	13.4	168	295
12 G 2.5	16.0	288	440
18 G 2.5	20.4	432	698
25 G 2.5	24.7	600	1045
3 G 4	10.9	115	190
4 G 4	12.1	154	247
5 G 4	13.5	192	312
7 G 4	18.6	269	452
3 G 6	13.0	173	288
4 G 6	14.2	230	363
7 G 6	19.8	403	622





CONTACT PERSON

Dipl. Ing. Peter Tomka
+421 37 6969631
peter.tomka@ics-cables.sk

