



We Make
Modern Life
Possible




Copper wire braidings, flat

Bare copper wire braidings, flat

EARTHING AND SHORT CIRCUITING CABLES AND BARE WIRES

Our bare copper wire braidings / earthing straps are used for protective earthing within cabinets or for applying an additional shield around electrical connections in dry rooms without corrosive environment.

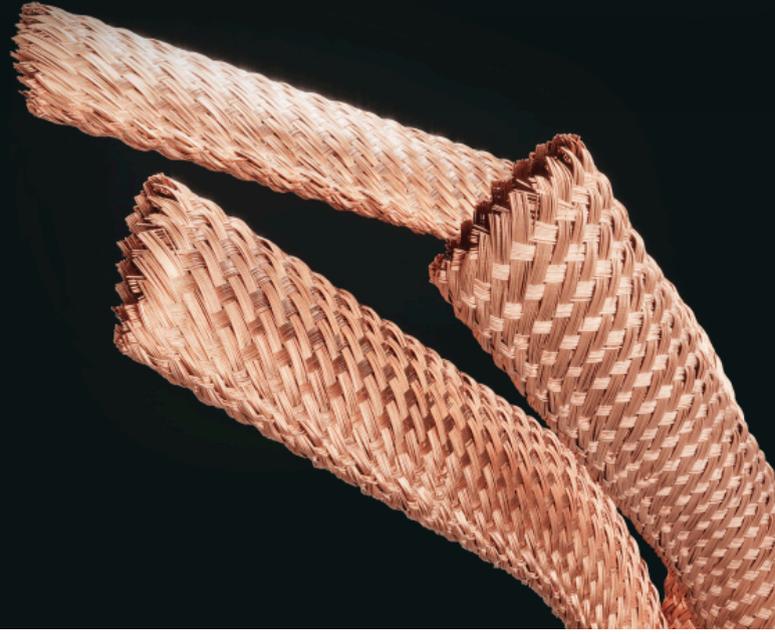

TECHNICAL DATA



Standard
TS ICS 43-2020

DESIGN



1

Bare copper wire or stranded bare copper wire braiding (flat)

Single wire diameter (mm)	Conductor cross section (mm ²)	Width of flattened conductor (mm)	Height of flattened conductor (mm)	Cu-value (kg/km)
0.07	6	8.5	0.9	58
0.07	10	11.5	1.2	96
0.07	16	15.2	1.4	154
0.07	20	16.8	1.7	192
0.07	25	19	1.9	240
0.07	35	21.5	2.4	336
0.1	10	11.2	1.3	96
0.1	16	15.5	1.5	154
0.1	25	20	2	240
0.1	35	24	2.2	336
0.1	50	28.5	2.8	480
0.2	25	22	1.6	240
0.2	35	24.5	2.4	336
0.2	50	31	2.7	480
0.2	70	35	3.8	672

CONTACT PERSON

Dipl. Ing. Peter Tomka
+421 37 6969631
peter.tomka@ics-cables.sk

