



We Make  
Modern Life  
Possible




# Copper wire braidings, round

Bare copper wire braidings, round

EARTHING AND SHORT CIRCUITING CABLES AND BARE WIRES

Our bare copper wire braidings / earthing straps are used for protective earthing within cabinets or for applying an additional shield around electrical connections in dry rooms without corrosive environment.

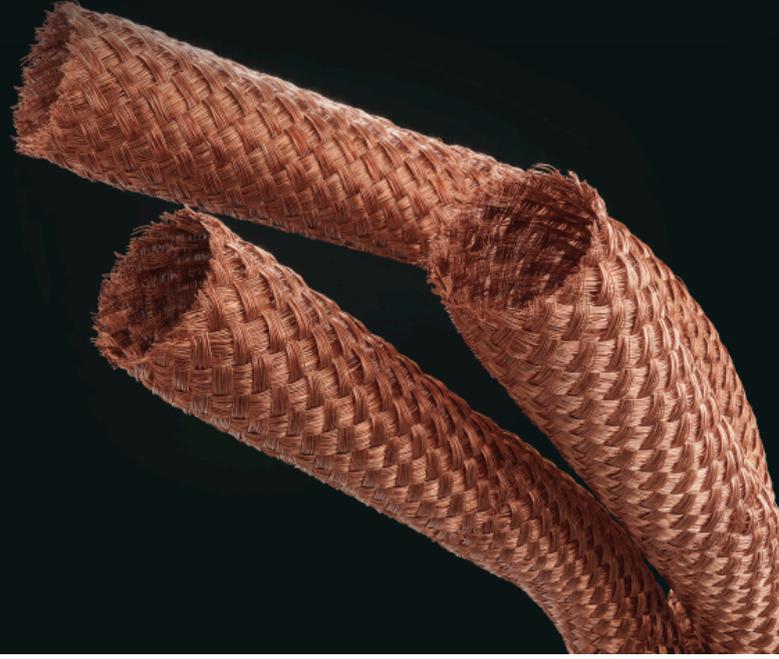

## TECHNICAL DATA



Standard  
TS ICS 43-2020

## DESIGN



Bare copper wire or stranded bare copper wire braiding (round)

Single wire diameter (mm)	Conductor cross section (mm <sup>2</sup> )	Outer diameter appr. (mm)	Cu-value (kg/km)
0.07	6	5.0	58
0.07	10	7.0	96
0.07	16	8.5	154
0.07	20	10.0	192
0.07	25	11.0	240
0.07	35	13.5	336
0.1	10	7.0	96
0.1	16	8.5	154
0.1	25	11.0	240
0.1	35	13.5	336
0.1	50	17.0	480
0.2	25	11.0	240
0.2	35	13.5	336
0.2	50	17.0	480
0.2	70	20.0	672



#### CONTACT PERSON

Dipl. Ing. Peter Tomka  
+421 37 6969631  
peter.tomka@ics-cables.sk

