



H05V-K

PVC insulated wire

INSTALLATION AND HARMONISED CABLES AND WIRES

PVC insulated wires for fixed and protected installations, for internal wiring of equipment and lightings, for signalling and control circuits.



TECHNICAL DATA



Standard
EN 50525-2-31



Test Voltage
2000 V



Rated Voltage
300/500 V (U_o/U)



Bending radius (min.)
Fixed installation: 3 x ϕ of cable
Flexible use: 5 x ϕ of cable



Fire properties
EN 60332-1-2: self-extinguishing and flame retardant
CPR classification: Eca




Core identification
According to EN 50525-1 - black, white, blue, brown, red, orange, violet, pink, green/yellow, yellow, green, grey



Temperature range
Laying temperature: min. 5°C
Fixed installation: -30°C up to 70°C
Flexible use: -5°C up to 70°C

DESIGN

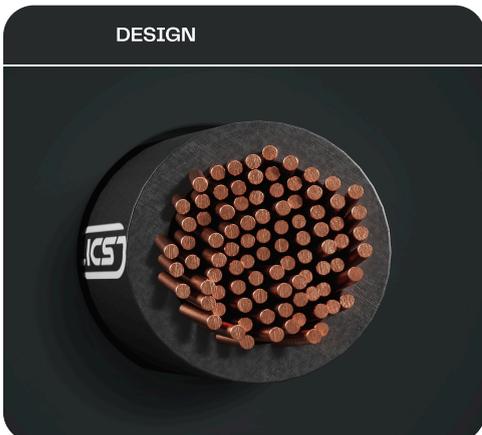

- 1 Bare copper conductors, fine wires class 5 according to DIN EN 60228 / VDE 0295 / IEC 60228
- 2 Core insulation of special compound based on polyvinyl chloride (PVC)

Number of cores x nominal cross-section (mm ²)	Outer diameter appr. (mm)	Cu-value (kg/km)	Total weight appr. (kg/km)
1 x 0.5	2.0	4.8	8
1 x 0.75	2.2	7.2	11
1 x 1	2.4	9.6	13

CONTACT PERSON

Dipl. Ing. Peter Tomka
+421 37 6969631
peter.tomka@ics-cables.sk

