




We Make
Modern Life
Possible



2YSL(St)CY-J 0.6/1 kV EMV

PE/PVC motor power supply cable, screened

Double screened 2YSL(St)CY-J cables were designed as supply and connecting cables, for medium mechanical stress, fixed installation and occasionally non-guided movements, in dry, damp and wet rooms. UV-resistant black sheath is designed for outdoor applications. Double screening considerably improves electromagnetic compatibility (EMC) in buildings and plants.

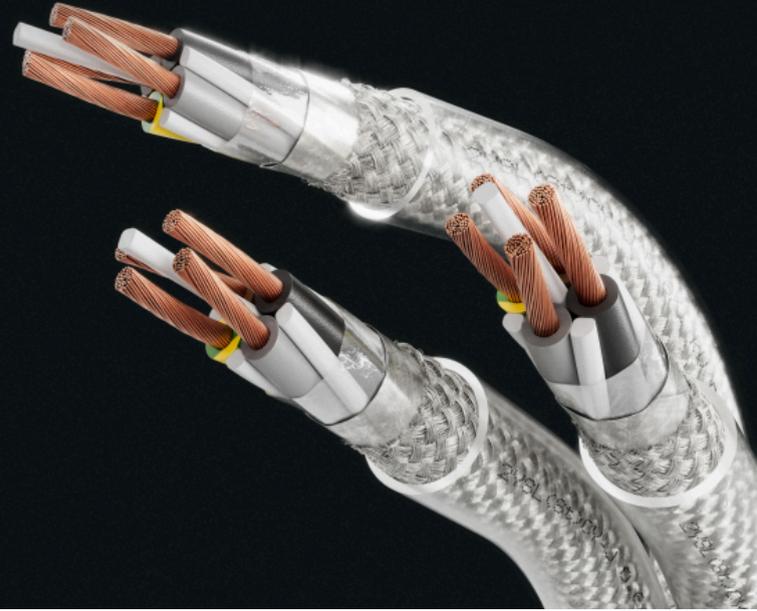

TECHNICAL DATA



Standard
DIN VDE 0276-603



Test Voltage
4 kV / 50 Hz



Rated Voltage
0.6/1 kV (U₀/U)



Bending radius (min.)
15 x Ø of cable (free motion)



Fire properties
EN 60332-1-2: self-extinguishing and flame retardant



Core identification
HD 308 S2



Temperature range
Laying temperature: min. 5°C
Conductor temperature: max. 70°C
Short circuit temperature: max. 160°C
Fixed installation: -30°C up to 80°C
Flexible use: -5°C up to 70°C

DESIGN



Number of cores x nominal cross-section (mm ²)	Max. conductor resistance (Ω/km)	Outer diameter appr. (mm)	Total weight appr. (kg/km)	Standard lengths/packing (m)
4 G 1,5	13.3	10.6	244	500 T, 1000 T
4 G 2,5	7.98	12.3	318	500 T, 1000 T
4 G 4	4.95	14.0	515	500 T, 1000 T
4 G 6	3.3	16.1	670	500 T, 1000 T
4 G 10	1.91	19.7	914	500 T, 1000 T
4 G 16	1.21	23.0	1367	500 T, 1000 T
4 G 25	0.78	27.3	1970	500 T, 1000 T
4 G 35	0.554	30.3	2763	500 T, 1000 T
4 G 50	0.386	35.0	3126	500 T, 1000 T
4 G 70	0.272	40.0	4182	500 T, 1000 T
4 G 95	0.206	45.0	5725	500 T, 1000 T
4 G 120	0.161	51.9	6504	500 T
4 G 150	0.129	57.5	7043	300 T
4 G 185	0.106	61.1	8384	300 T
4 G 240	0.801	70.0	12500	300 T

CONTACT PERSON

Dogan Özcan
Head of Technical Department
+43 (0) 1 70170-154
dogan.oezcan@skw.at

