




S-2Y2YBY quad

Railway signalling cable, unscreened, armoured

RAILWAY SIGNALLING AND TELECOMMUNICATIONS CABLES

Safety and control cable for fixed installation in railway installations. The cables must be protected from the constant influence of sunlight.

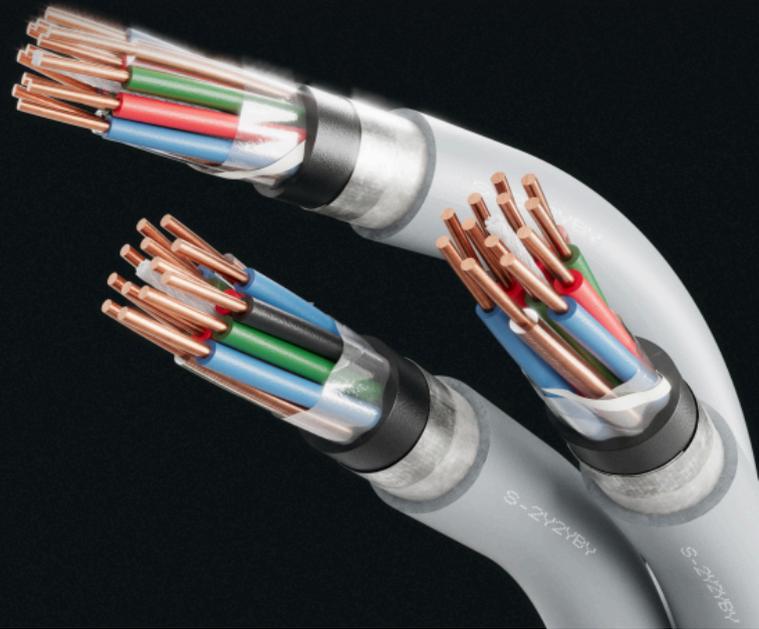

TECHNICAL DATA



Standard
ÖVE-K 11



Rated Voltage
max. 250 V



Bending radius (min.)
12 x ϕ of cable



Fire properties
EN 60332-1-2: flame retardant



Core identification
Colour code with trace quad in each layer



Temperature range
Laying temperature: min. -5°C
Operating temperature: -30°C up to 60°C
Conductor temperature: max. 80°C

DESIGN



- 1 Copper conductor, round solid (RE)
- 2 Core insulation (PE), cores star quaded and quads stranded in layers
- 3 Inner covering (plastic foil)
- 4 Inner sheath (PE, black)
- 5 Armouring (bare steel tape, wrapped with plastic tape)
- 6 Sheath (PVC grey RAL 7035)

Number of quads x conductor diameter	Standard lengths/packing (m)	Outer diameter appr. (mm)	Total weight appr. (kg/km)
1 x 4 x 0.8	1000 D	12,3	210
20 x 4 x 1.8	500 D, 1000 D	32,1	1182
5 x 4 x 0.9	500 D, 1000 D	21,0	573
5 x 4 x 1.4	500 D, 1000 D	29,5	977
2 x 4 x 0.8	1000 D	17,3	294
15 x 4 x 1.8	500 D, 1000 D	29,0	979
7 x 4 x 0.9	500 D, 1000 D	23,2	670
7 x 4 x 1.4	500 D, 1000 D	32,6	1181
3 x 4 x 0.8	1000 D	18,4	353
25 x 4 x 1.8	500 D, 1000 D	35,6	1435
10 x 4 x 0.9	500 D, 1000 D	27,2	881
10 x 4 x 1.4	500 D, 1000 D	39,3	1639
5 x 4 x 0.8	1000 D	20,6	469
15 x 4 x 0.9	500 D, 1000 D	31,1	1151
15 x 4 x 1.4	500 D, 1000 D	46,5	2195
7 x 4 x 0.8	500 D, 1000 D	21,0	546
20 x 4 x 0.9	500 D, 1000 D	35,3	1449
20 x 4 x 1.4	500 D, 1000 D	52,5	2816
10 x 4 x 0.8	500 D, 1000 D	25,5	754
25 x 4 x 0.9	500 D, 1000 D	38,7	1696
25 x 4 x 1.4	500 D, 1000 D	57,8	3414
1 x 4 x 0.8	500 D, 1000 D	14,0	244
1 x 4 x 0.9	500 D, 1000 D	15,7	331
2 x 4 x 0.8	500 D, 1000 D	18,0	337
2 x 4 x 0.9	500 D, 1000 D	24,5	608
3 x 4 x 0.8	500 D, 1000 D	18,2	403
3 x 4 x 0.9	500 D, 1000 D	25,3	698

CONTACT PERSON

Ing. Štěpán Laštůvka
Product Supervisor
+420 732 912 682
stepan.lastuvka@prakab.com

