


PRAFlaDur+

1-CSKH-V180+ P15-R - P60-R, PH120-R, P75090-R, PS15 - PS60, B2ca s1a d1 a1 SiR/FRNC energy cables, with circuit integrity, UV resistant, Water resistant

SAFETY CABLES WITH CIRCUIT INTEGRITY

Cables are designed for fixed distribution of electricity in buildings with a high concentration of people to protect them and protect the technical equipment of buildings in the event of fire, where there is no requirement to maintain the functionality of the cable installation in fire. In case of fire, the cable releases a small amount of heat and smoke. The cables are resistant to UV radiation and water AD1-AD7.

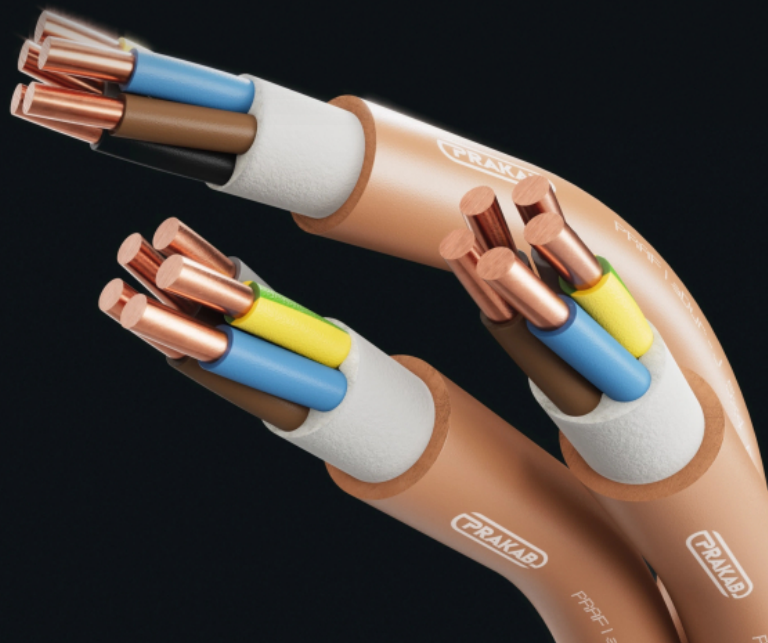

TECHNICAL DATA



Standard

ČSN 34 7660-100
TP PRAKAB 01/21



Certificate

EZÚ Czech Republic
TSÚS Slovakia



Test Voltage

core/core 4 kV / 50 Hz



Rated Voltage

0,6/1 kV



Bending radius (min.)

12 x Ø of cable (multicore)
15 x Ø of cable (singlecore)



Fire properties

ČSN EN 60332-1-2: self-extinguishing
ČSN EN 60754-2: halogen-free, non-corrosive combustion gases
ČSN EN 61034-2: low smoke emission
ČSN EN 60332-3-22: reduced flame propagation
ČSN 73 0895, STN 92 0205: circuit integrity
ČSN EN 13501-6: fire classification
CPR Classification: B2ca s1a d1 a1



Core identification

ČSN 33 0166 ed. 2
ČSN EN 50334



Temperature range

Laying temperature: min. -5°C
Operating temperature: -50°C up to 60°C
Conductor temperature: max. 90°C
Short circuit temperature: max. 250°C

DESIGN



- 1 Copper conductor, round solid (RE) resp. round stranded (RM)
- 2 Core insulation (Silicone rubber)
- 3 Inner covering (halogen-free filling compound)
- 4 Sheath (halogen-free polymer compound, brown, UV resistant, Water resistant)

Number of cores x nominal cross-section (mm ²)	Max. conductor resistance (Ω/km)	Current rating in the earth (A)	Current rating in the air (A)	Outer diameter appr. (mm)	Total weight appr. (kg/km)
2 x 1.5 RE	12.1	45	29	9.3	126
3 x 1.5 RE	12.1	39	24	9.8	145
4 x 1.5 RE	12.1	39	24	10.5	169
5 x 1.5 RE	12.1	39	24	11.3	196
7 x 1.5 RE	12.1	19	16	12.2	243
12 x 1.5 RE	12.1	15	13	15.8	396
19 x 1.5 RE	12.1	12	11	18.4	562
24 x 1.5 RE	12.1	11	10	21.4	732
37 x 1.5 RE	12.1	10	9	24.5	1011
48 x 1.5 RE	12.1	9	8	29.1	1389
2 x 2.5 RE	7.41	59	39	10.1	158
3 x 2.5 RE	7.41	51	32	10.6	185
4 x 2.5 RE	7.41	51	32	11.4	219
5 x 2.5 RE	7.41	51	32	12.4	257
7 x 2.5 RE	7.41	24	21	13.5	330
12 x 2.5 RE	7.41	19	17	17.4	534
19 x 2.5 RE	7.41	16	14	20.5	780
24 x 2.5 RE	7.41	14	13	23.9	1012
37 x 2.5 RE	7.41	13	12	28.4	1497
48 x 2.5 RE	7.41	11	10	32.8	1964
2 x 4 RE	4.61	77	51	11.8	222
3 x 4 RE	4.61	66	42	12.6	268
4 x 4 RE	4.61	66	42	13.6	321
5 x 4 RE	4.61	66	42	14.8	377
7 x 4 RE	4.61	31	27	16.0	480
12 x 4 RE	4.61	25	22	21.2	810
2 x 6 RE	3.08	97	65	12.9	285
3 x 6 RE	3.08	82	53	13.7	343
4 x 6 RE	3.08	82	53	14.8	414
5 x 6 RE	3.08	82	53	16.1	491
2 x 10 RE	1.83	130	89	14.8	407
3 x 10 RE	1.83	110	73	15.7	501
4 x 10 RE	1.83	110	73	17.1	613
5 x 10 RE	1.83	110	73	18.9	746
2 x 16 RE	1.15	168	118	16.7	561
3 x 16 RE	1.15	142	98	17.7	704
4 x 16 RE	1.15	142	98	19.7	890
5 x 16 RE	1.15	142	98	21.5	1075
1 x 25 RM	0.727	294	177	13.4	388
3 x 25 RM	0.727	182	133	22.3	1120
3 x 25 + 16 RM/RE	0.727 / 1.15	182	133	23.3	1268
4 x 25 RM	0.727	182	133	24.5	1399
5 x 25 RM	0.727	182	133	28.2	1788
1 x 35 RM	0.524	355	217	14.5	490
3 x 35 RM	0.524	221	162	25.9	1549
3 x 35 + 16 RM/RE	0.524 / 1.15	221	162	26.7	1683
3 x 35 + 25 RM/RM	0.524 / 0.727	221	162	27.8	1815
4 x 35 RM	0.524	221	162	28.3	1916
5 x 35 RM	0.524	221	162	31.7	2385
1 x 50 RM	0.387	419	265	16.4	640
3 x 50 RM	0.387	262	197	29.6	2045
3 x 50 + 25 RM/RM	0.387 / 0.727	262	197	31.6	2341



Number of cores x nominal cross-section (mm ²)	Max. conductor resistance (Ω/km)	Current rating in the earth (A)	Current rating in the air (A)	Outer diameter appr. (mm)	Total weight appr. (kg/km)
3 x 50 + 35 RM/RM	0.387 / 0.524	262	197	32.2	2451
4 x 50 RM	0.387	262	197	33.1	2598
5 x 50 RM	0.387	262	197	36.3	3150
1 x 70 RM	0.268	516	336	18.0	851
3 x 70 RM	0.268	321	250	33.9	2819
3 x 70 + 35 RM/RM	0.268 / 0.524	321	250	35.3	3136
3 x 70 + 50 RM/RM	0.268 / 0.387	321	250	36.2	3294
4 x 70 RM	0.268	321	250	37.4	3535
5 x 70 RM	0.268	321	250	41.0	4299
1 x 95 RM	0.193	616	415	20.1	1127
3 x 95 RM	0.193	384	308	38.7	3802
3 x 95 + 50 RM/RM	0.193 / 0.387	384	308	40.5	4232
4 x 95 RM	0.193	384	308	43.1	4829
5 x 95 RM	0.193	384	308	47.4	5874
1 x 120 RM	0.153	704	485	21.6	1375
3 x 120 RM	0.153	490	359	41.5	4607
3 x 120 + 50 RM/RM	0.153 / 0.387	490	359	43.5	5082
3 x 120 + 70 RM/RM	0.153 / 0.268	490	359	44.5	5320
4 x 120 RM	0.153	490	359	46.2	5863
5 x 120 RM	0.153	490	359	51.1	7173
1 x 150 RM	0.124	788	557	23.5	1665
3 x 150 RM	0.124	490	412	46.3	5707
3 x 150 + 70 RM/RM	0.124 / 0.268	490	412	48.0	6283
4 x 150 RM	0.124	490	412	51.0	7175
5 x 150 RM	0.124	490	412	56.8	8844
1 x 185 RM	0.099	889	646	25.8	2051
3 x 185 RM	0.099	552	475	51.1	7043
3 x 185 + 95 RM/RM	0.099 / 0.193	552	475	53.7	7929
4 x 185 RM	0.099	552	475	56.7	8929
5 x 185 RM	0.099	552	475	62.7	10936
1 x 240 RM	0.075	1032	774	28.6	2625
3 x 240 RM	0.075	639	564	57.7	9138
3 x 240 + 120 RM/RM	0.075 / 0.153	639	564	60.0	10158
4 x 240 RM	0.075	639	564	64.0	11586

CONTACT PERSON

Jan Pietroň
Key Account Manager
+420 604 471 907
jan.pietron@koneka.cz

