

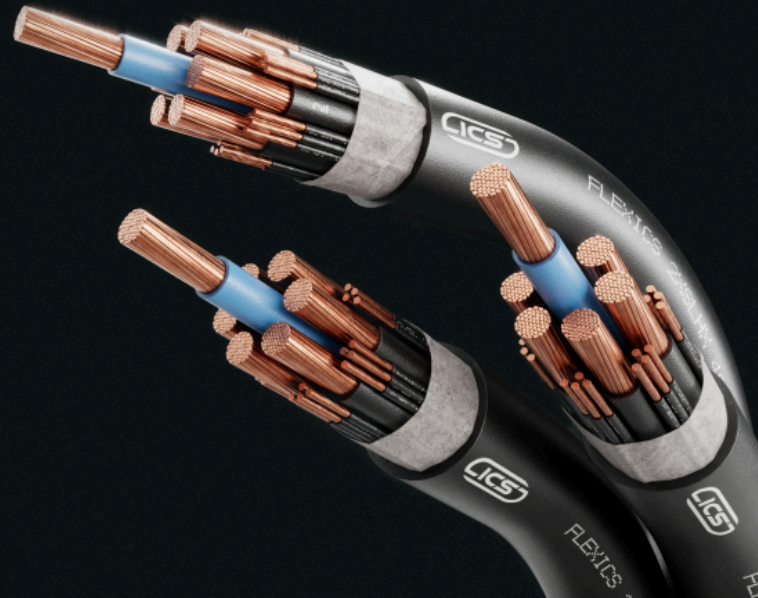


FLEXICS® 2XSLHX 400Hz 7x35+6x(4x1)






Ground power supply cable, with control cores,
halogen-free

SPECIAL CABLES

400 Hz cables are mainly used to supply power to aircrafts (onboard power).
May be operated in mobile, stationary or underground mode. Simple, long-
lasting and easy to install design with a fair market price and great quality.



TECHNICAL DATA

- | | |
|--|--|
| <p> Test Voltage
4000 V / 50 Hz</p> <hr/> <p> Rated Voltage
0.6/1 kV (U₀/U)</p> <hr/> <p> Bending radius (min.)
6 x Ø of cable</p> | <p> Fire properties
EN 60332-1-2: self-extinguishing and flame retardant
IEC 60754-1: halogen-free</p> <hr/> <p> Core identification
Central blue core, other cores black (continuously numbered)</p> <hr/> <p> Temperature range
Conductor temperature: max. 90°C
Fixed installation: -40°C up to 90°C
Flexible use: -15°C up to 80°C</p> |
|--|--|

DESIGN



- 1 Bare copper conductors, fine wires class 5 according to DIN EN 60228 / VDE 0295 / IEC 60228
- 2 Power supply control cores insulation of cross-linked polyethylene (XLPE); control cores of special compound based on polypropylene (PP)
- 3 Power supply cores (black with No. 1-6) stranded over central core (blue) with 6 star-quads in the interstices
- 4 Non-woven tape separation
- 5 Outer sheath of special cross-linked compound (XLPE), free of halogen and flame retardant, colour: black (RAL 9005)

Number of cores x nominal cross-section (mm ²)	Outer diameter appr. (mm)	Cu-value (kg/km)	Total weight appr. (kg/km)
7 x 35 + 6 x (4 x 1)	36.0	2625	2922



CONTACT PERSON

Jan Pietroň
 Key Account Manager
 +420 604 471 907
 jan.pietron@koneka.cz

