




Cu rope, RMk, soft, IEC

Cu rope, soft, compressed

BARE CONDUCTORS

Conductors are designed for connection of points with equal electric potential or for high currents.

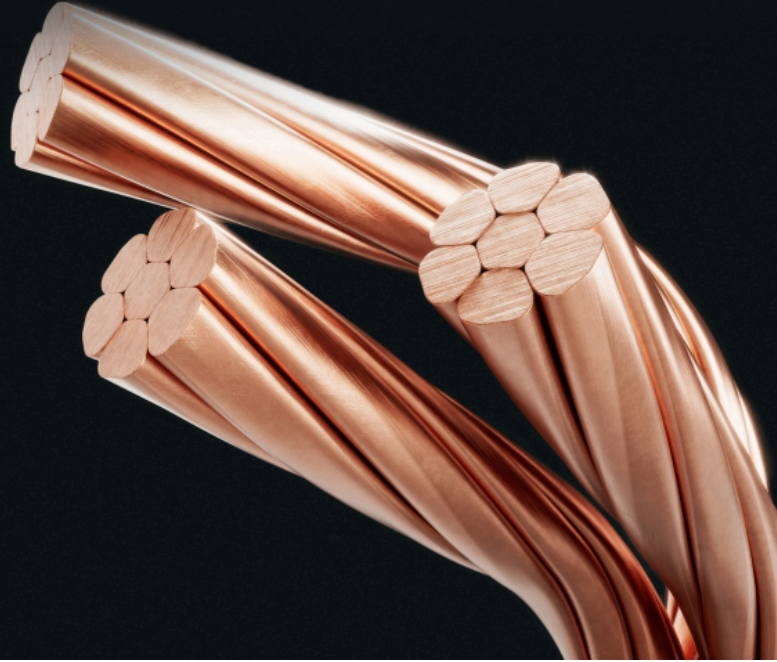

TECHNICAL DATA



Standard
ČSN EN 60228



Bending radius (min.)
15 x \varnothing rope

DESIGN



- 1 Copper wires, bare, soft
- 2 Stranded, round, compressed

| Conductor cross section (mm ²) | Number of wires in the rope | Direction of outer layer | Max. conductor resistance (Ω/km) | Outer diameter appr. (mm) | Total weight appr. (kg/km) |
|--|-----------------------------|--------------------------|----------------------------------|---------------------------|----------------------------|
| 6 | 7 | left (S) | 3.08 | 3.1 | 55 |
| 10 | 7 | left (S) | 1.83 | 3.9 | 90 |
| 16 | 7 | left (S) | 1.15 | 4.9 | 140 |
| 25 | 7 | left (S) | 0.727 | 6.1 | 220 |
| 35 | 7 | left (S) | 0.524 | 7.3 | 305 |
| 50 | 7 | left (S) | 0.387 | 8.3 | 415 |
| 50 | 19 | left (S) | 0.387 | 8.4 | 415 |
| 70 | 19 | left (S) | 0.268 | 10.0 | 595 |
| 95 | 19 | left (S) | 0.193 | 11.8 | 825 |
| 120 | 19 | left (S) | 0.153 | 13.0 | 1040 |
| 150 | 19 | left (S) | 0.124 | 14.5 | 1285 |
| 185 | 37 | left (S) | 0.099 | 16.5 | 1605 |
| 240 | 37 | left (S) | 0.075 | 18.9 | 2110 |
| 300 | 61 | left (S) | 0.060 | 21.4 | 2650 |
| 400 | 61 | left (S) | 0.047 | 24.2 | 3385 |
| 500 | 61 | left (S) | 0.037 | 27.4 | 4345 |

CONTACT PERSON

Vojtěch Cuřin
Product Supervisor
+420 731 226 023
vojtech.curin@prakab.com

