




# JE-H(St)H...Bd FE180/E30-E90 RAL3020

SiR/FRNC halogen-free installation cable with insulation integrity and circuit integrity, screened

SAFETY CABLES WITH CIRCUIT INTEGRITY

Measuring and control cable providing functional integrity in the event of fire.  
Not designed for laying in earth or water. Not UV and water resistant.

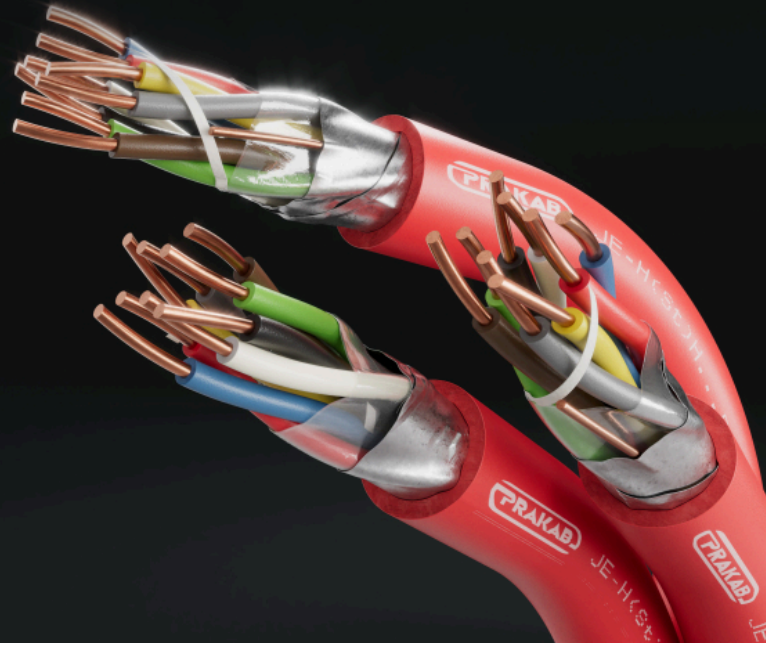

## TECHNICAL DATA



**Standard**  
adapted to DIN VDE 0815



**Bending radius (min.)**  
7,5 x Ø of cable



**Core identification**  
DIN VDE 0815



**Certificate**  
VDE Germany



**Fire properties**  
EN 60332-1-2: self-extinguishing  
EN 60754-2: halogen-free, non-corrosive combustion gases  
EN 61034-2: low smoke emission  
EN 60332-3-22: reduced flame propagation  
IEC 60331-23: insulation integrity FE180  
DIN 4102-12: circuit integrity E30-E90



**Temperature range**  
Laying temperature: min. -5°C  
Operating temperature: -30°C up to 70°C



**Test Voltage**  
core/core 500 V / 50 Hz  
core/screen 2000 V / 50 Hz



**Rated Voltage**  
max. 225 Vss

## DESIGN



- 1 Copper conductor, round solid (RE)
- 2 Core insulation (silicone rubber), cores pair stranded, marking with green thread
- 3 Inner covering (plastic tape)
- 4 Screen (plastic laminated aluminium tape with drain wire)
- 5 Sheath (halogen-free polymer compound, red)

## Electrical parameters

Conductor diameter	mm	0.8
Loop resistance max	Ω/km	73.2
Mutual capacitance (approx. value), at 800 Hz	nF/km	120
Mutual capacitance, max.	nF/km	144
Capacitance unbalance, max. k	pF/500m	400
Insulation resistance, min. at 20 °C	MΩ/km	100

Number of pairs x nominal diameter	Outer diameter appr. (mm)	Total weight appr. (kg/km)
1 x 2 x 0.8	7.3	63
2 x 2 x 0.8	8.1	86
4 x 2 x 0.8	11.3	140
8 x 2 x 0.8	13.9	225
12 x 2 x 0.8	16.3	307
16 x 2 x 0.8	18.3	386
20 x 2 x 0.8	20.5	482
32 x 2 x 0.8	25.3	734
52 x 2 x 0.8	31.0	1108

## CONTACT PERSON

**Ing. Štěpán Laštůvka**  
 Product Supervisor  
 +420 732 912 682  
[stepan.lastuvka@prakab.com](mailto:stepan.lastuvka@prakab.com)

