




L-H(St)H EIB

Motor power supply cable for EIB-Bus, halogen-free, screened

For installation on and under plaster in dry, damp and wet locations, as a BUS cable (EIB installation bus) and as a measuring and control cable in power installations.

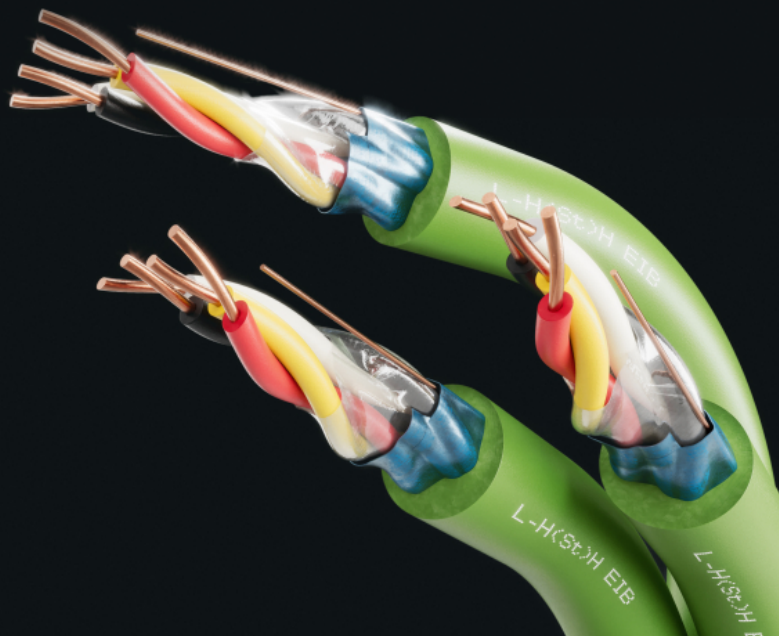

TECHNICAL DATA



Standard
adapted to DIN VDE 0815



Test Voltage
800 Veff (core/core) / 50 Hz
4000 Veff (core/screen) / 50 Hz



Rated Voltage
max. 300 Vss



Bending radius (min.)
7.5 x ϕ of cable



Fire properties
EN 60332-1-2: flame retardant
EN 60754-1 and 2: halogen-free; non-corrosive combustion gases
CPR classification: Eca



Core identification
1st. circuite: red (a), black (b) 2nd. circuite: white (a), yellow (b)



Temperature range
Laying temperature: min. -5°C
Fixed installation: -30°C up to 70°C
Flexible use: -5°C up to 50°C

DESIGN



- 1 Copper conductor, round solid (RE)
- 2 Core insulation (halogen-free polymer compound), cores stranded to star quads
- 3 Taping (halogen-free plastic foil)
- 4 Screen (plastic laminated aluminium tape with drain wire)
- 5 Sheath (PVC grey RAL 7035 or green RAL 6018)

Electrical parameters

Conductor diameter	mm	0.8
Conductor resistance, max. at 20 °C	Ω/km	73.2
Insulation resistance, min. at 20 °C	MΩ/km	100
Mutual capacitance (approx. value), at 800 Hz	nF/km	100
Capacitance unbalance at 800 Hz, k1 max.	pF/km	200

Number of cores x nominal cross-section

Outer diameter appr. (mm)

Total weight appr. (kg/km)

Standard lengths/packing (m)

2 x 2

0.8

60

1000 Sp

CONTACT PERSON

Dogan Özcan

Head of Technical Department

+43 (0) 1 70170-154

dogan.oezcan@skw.at

