




N2XH

XLPE/FRNC copper energy cable, halogen-free

SAFETY CABLES WITH CIRCUIT INTEGRITY

These cables are intended for the stationary distribution of electrical energy in dry or damp premises and for fixed installations in air or concrete. Suitable for hotels, hospitals, underground railways, airports etc. to protect people and technical building equipment in the event of fire if circuit integrity is not required. Not allowed for installations underground or in water.

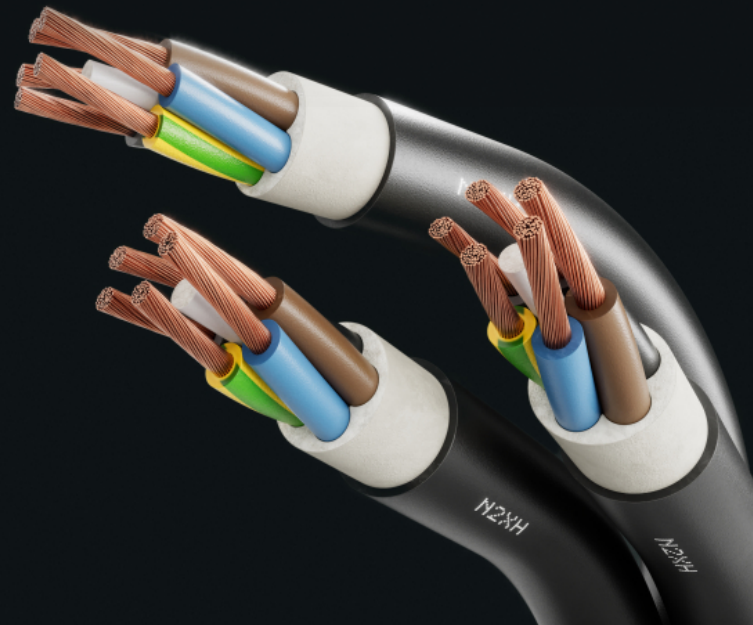

TECHNICAL DATA



Standard
DIN VDE 0276-604



Certificate
VDE Germany



Test Voltage
core/core 4 kV / 50 Hz



Rated Voltage
0.6/1 kV



Bending radius (min.)
12 x Ø of cable



Fire properties
EN 60332-1-2: self-extinguishing
EN 60754-2: halogen-free, non-corrosive combustion gases
EN 61034-2: low smoke emission
EN 60332-3-22: reduced flame propagation




Core identification
HD 308 S2



Temperature range
Laying temperature: min. -5°C
Operating temperature: -50°C up to 90°C
Conductor temperature: max. 90°C
Short circuit temperature: max. 250°C

DESIGN

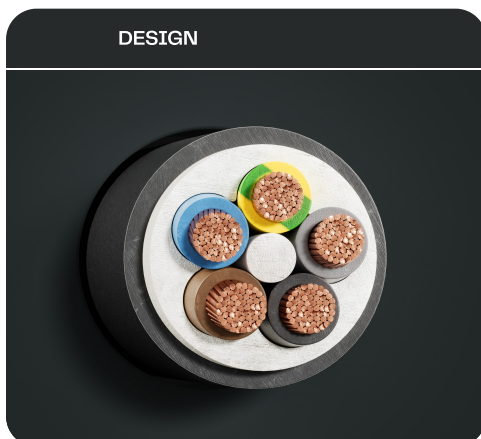

- 1 Copper conductor, round solid (RE), round stranded (RM) resp. sector-shaped stranded (SM)
- 2 Core insulation (XLPE)
- 3 Inner covering (halogen-free tape and halogen free polymer compound)
- 4 Sheath (halogen-free polymer compound black)

Number of cores x nominal cross-section (mm ²)	Max. conductor resistance (Ω/km)	Current rating in the air (A)	Outer diameter appr. (mm)	Total weight appr. (kg/km)
2 x 1.5 RE	12.1	28	9.8	136
3 x 1.5 RE	12.1	24	10.3	153
4 x 1.5 RE	12.1	24	11	177
5 x 1.5 RE	12.1	16	11.8	203
7 x 1.5 RE	12.1	15.5	12.7	247
10 x 1.5 RE	12.1	14	15.7	362
12 x 1.5 RE	12.1	12.5	16.2	395
14 x 1.5 RE	12.1	12.5	16.9	436
19 x 1.5 RE	12.1	10.5	19	650
24 x 1.5 RE	12.1	9.5	22	760
30 x 1.5 RE	12.1	9	23.2	900
40 x 1.5 RE	12.1	8	26	1200
2 x 2.5 RE	7.41	37	10.6	168
3 x 2.5 RE	7.41	37	11.1	194
4 x 2.5 RE	7.41	32	11.9	228
5 x 2.5 RE	7.41	22	12.9	265
7 x 2.5 RE	7.41	20.5	14.1	336
10 x 2.5 RE	7.41	19	17.3	483
12 x 2.5 RE	7.41	16.5	17.8	533
14 x 2.5 RE	7.41	16	18.6	593
2 x 4 RE	4.61	49	11.5	210
3 x 4 RE	4.61	42	12.1	248
4 x 4 RE	4.61	42	13	295
5 x 4 RE	4.61	28	14.2	353
7 x 4 RE	4.61	27	15.3	444
12 x 4 RE	4.61	27	19.9	731
14 x 4 RE	4.61	27	20.8	817
2 x 6 RE	3.08	62	12.4	266
3 x 6 RE	3.08	53	13.1	320
4 x 6 RE	3.08	53	14.3	393
5 x 6 RE	3.08	36	15.5	463
7 x 6 RE	3.08	36	16.8	592
2 x 10 RE	1.83	85	14.4	389
3 x 10 RE	1.83	74	15.3	478
4 x 10 RE	1.83	74	16.5	583
5 x 10 RE	1.83	49	18	700
5 x 10 RM	1.83	49	18.5	723
7 x 10 RE	1.83	49	19.8	914
1 x 16 RM	1.15	131	10.5	233
2 x 16 RE	1.15	113	16.3	540
3 x 16 RE	1.15	98	17.2	677
4 x 16 RE	1.15	98	19	850
4 x 16 RM	1.15	98	19.6	877
5 x 16 RE	1.15	65	20.7	1025
5 x 16 RM	1.15	65	21.4	1058
1 x 25 RM	0.727	177	12	335
3 x 25 RM	0.727	133	21.4	1061
3 x 25 + 16 RM/RM	0.727	133	22.5	1211
4 x 25 RM	0.727	133	23.3	1315
5 x 25 RM	0.727	133	25.8	1605
1 x 35 RM	0.524	217	13.3	439
3 x 35 RM	0.524	162	23.7	1387



Number of cores x nominal cross-section (mm ²)	Max. conductor resistance (Ω/km)	Current rating in the air (A)	Outer diameter appr. (mm)	Total weight appr. (kg/km)
3 x 35 + 16 SM/RM	0.524	162	24.2	1486
4 x 35 RM	0.524	162	26.1	1742
4 x 35 SM	0.524	162	24.2	1599
5 x 35 RM	0.524	162	28.6	2111
1 x 50 RM	0.387	265	14.7	567
3 x 50 + 25 SM/RM	0.387	197	27.5	1968
4 x 50 SM	0.387	197	27.7	2107
4 x 50 RM	0.387	197	29.5	2290
5 x 50 RM	0.387	197	32.9	2826
1 x 70 RM	0.268	336	16.7	777
3 x 70 SM	0.268	250	28.5	2263
3 x 70 + 35 SM/RM	0.268	250	31.2	2740
4 x 70 SM	0.268	250	31.2	2942
5 x 70 RM	0.268	250	38.5	3984
5 x 70 SM	0.268	250	34.8	3658
1 x 95 RM	0.193	415	18.4	1028
3 x 95 SM	0.193	308	31.3	3023
3 x 95 + 50 SM/RM	0.193	308	35.6	3675
4 x 95 SM	0.193	308	35.6	3959
5 x 95 SM	0.193	308	37.9	4921
1 x 120 RM	0.153	485	20.2	1279
3 x 120 SM	0.153	359	34.1	3731
3 x 120 + 70 SM/RM	0.153	359	39.1	4615
4 x 120 SM	0.153	359	39.3	4956
5 x 120 SM	0.153	359	43.3	6148
1 x 150 RM	0.124	557	22.1	1556
3 x 150 SM	0.124	412	38.1	4600
3 x 150 + 70 SM/RM	0.124	412	43.9	5600
4 x 150 SM	0.124	412	44.1	6078
5 x 150 SM	0.124	412	47.9	7556
1 x 185 RM	0.0991	646	24.4	1927
3 x 185 SM	0.0991	475	41.9	5695
3 x 185 + 95 SM/SM	0.0991	475	44.4	6705
4 x 185 SM	0.0991	475	49.3	7567
5 x 185 SM	0.0991	475	54	9412
1 x 240 RM	0.0754	774	27	2473
3 x 240 SM	0.0754	564	46.7	7370
3 x 240 + 120 SM/SM	0.0754	564	50	8624
4 x 240 SM	0.0754	564	54.7	9771
5 x 240 SM	0.0754	564	63.5	12220
1 x 300 RM	0.0601	901	29.4	3049
1 x 400 RM	0.047	1060	33.4	3885
1 x 500 RM	0.0366	1252	37.2	4941
1 x 630 RM	0.0283	1486	41.4	6299

CONTACT PERSON

Dogan Özcan
Head of Technical Department
+43 (0) 1 70170-154
dogan.oezcan@skw.at

