




PRAFlaGuard+ F

SSKFH-V180 P15-R – P90-R, PH120-R, P75090-R, PS15 – PS90 B2ca s1a d1 a1 FRNC low-frequency communication cables, with maintaining the functionality, for outdoor and in-ground use – UV resistant, shielded

SAFETY CABLES WITH CIRCUIT INTEGRITY


The cables are designed for fixed installation in the air or in the ground, but also for installation inside buildings and in places with a high concentration of people, etc., to protect people and technical equipment of buildings where there is a requirement to maintain the functionality of the cable route in case of fire. The cable releases small amounts of heat and smoke in the event of a fire. The cables are UV and water resistant AD1 – AD7.

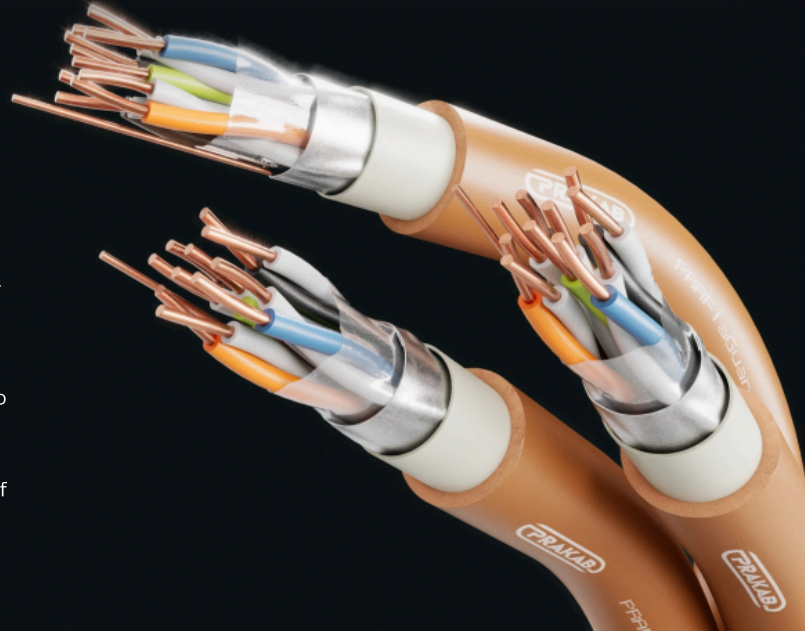

TECHNICAL DATA

<p> Standard TP PRAKAB 05/01</p> <hr/> <p> Certificate EZÚ Czech Republic</p> <hr/> <p> Test Voltage core/core 1,5 kV / 50 Hz core/screen 1 kV / 50 Hz</p> <hr/> <p> Rated Voltage 100 V</p>	<p> Bending radius (min.) 10 x Ø of cable up to do 20 mm 12 x Ø of cable from 20 mm to 40 mm 15 x Ø of cable over 40 mm</p> <hr/> <p> Fire properties ČSN EN 60332-1-2: self-extinguishing ČSN EN 60754-2: halogen-free, non-corrosive combustion gases ČSN EN 61034-2: low smoke emission ČSN EN 60332-3-22: reduced flame propagation ČSN 73 0895, STN 92 0205: circuit integrity ČSN EN 13501-6: fire classification CPR Classification: B2ca s1a d1 a1</p>	<p> Core identification IEC 60189-2</p> <hr/> <p> Temperature range Laying temperature: min. -5°C Operating temperature: -30°C up to 60°C</p>
--	--	---

DESIGN

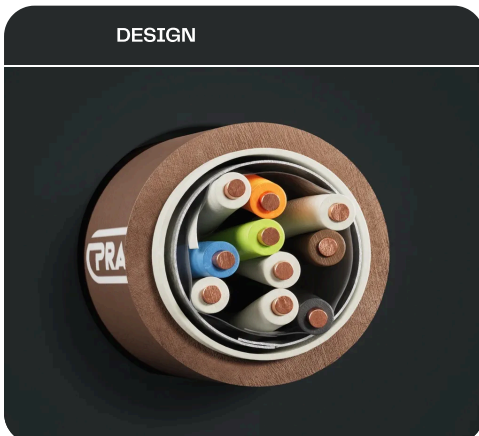

- 1 Copper conductor, round solid (RE)
- 2 Core insulation (silicone rubber), cores pair stranded
- 3 Inner covering (dielectric, separating tape)
- 4 Screen (plastic laminated aluminium tape with CuSn drainwire)
- 5 Inner covering (halogen-free polymer compound)
- 6 Sheath (halogen-free polymer compound, brown, UV resistant, water resistant)

Electrical parameters

Loop resistance max	Ω/km	75	50	36.2
Mutual capacitance, max.	nF/km	120	120	120
Capacitance unbalance, max. k	pF/500m	400	400	400
Conductor diameter	mm	0.8	1	1.12
Insulation resistance, min. at 20 °C	MΩ/km	500	500	500

Number of pairs x nominal diameter	Outer diameter appr. (mm)	Total weight appr. (kg/km)
1 x 2 x 0.8	7.9	76
2 x 2 x 0.8	10.6	118
3 x 2 x 0.8	11.1	139
4 x 2 x 0.8	12.1	169
5 x 2 x 0.8	13.3	200
10 x 2 x 0.8	16.5	313
12 x 2 x 0.8	17.5	362
15 x 2 x 0.8	19.0	427
16 x 2 x 0.8	19.5	448
1 x 2 x 1	8.7	93
2 x 2 x 1	11.9	148
3 x 2 x 1	12.5	178
4 x 2 x 1	13.7	218
5 x 2 x 1	14.9	254
10 x 2 x 1	19.0	421
12 x 2 x 1	20.0	487
15 x 2 x 1	21.9	580
16 x 2 x 1	22.6	621
1 x 2 x 1.12	9.3	106
2 x 2 x 1.12	13.0	172
3 x 2 x 1.12	13.7	208
4 x 2 x 1.12	15.0	257
5 x 2 x 1.12	16.3	301
10 x 2 x 1.12	21.1	508
12 x 2 x 1.12	22.0	579
15 x 2 x 1.12	24.3	704
16 x 2 x 1.12	24.9	742

CONTACT PERSON

Jan Petroň
Key Account Manager
+420 604 471 907
jan.pietron@koneka.cz

