



We Make  
Modern Life  
Possible



# NA2XS(F)2Y 6/10 kV

XLPE/HDPE medium voltage underground cable,  
longitudinally water-proof

ALUMINIUM – VDE

For fixed installation for high requirements in the ground subject to external effects of moisture, in the open air and in cable ducts for industrial and distribution mains – as permitted by the local building regulations – under severe mechanical stressing during installation and operation.



## TECHNICAL DATA



**Standard**  
DIN VDE 0276-620



**Certificate**  
VDE Germany



**Test Voltage**  
18 kV



**Rated Voltage**  
6/10 kV (U<sub>0</sub>/U)




**Bending radius (min.)**  
15 x  $\phi$  of cable



**Temperature range**  
Laying temperature: min. -20°C  
Operating temperature: -50°C up to 90°C  
Conductor temperature: max. 90°C  
Short circuit temperature: max. 250°C

## DESIGN

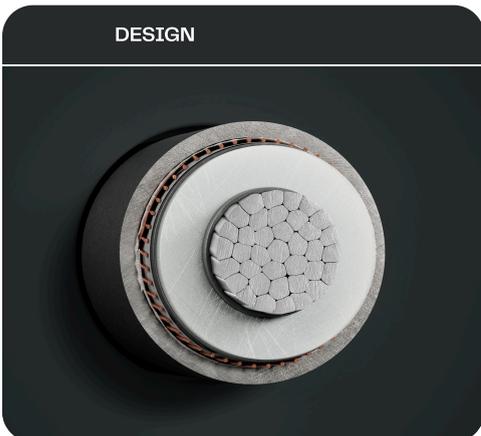

Number of cores x nominal cross-section / cross-section of screen (mm <sup>2</sup> )	Mutual capacitance (nF/km)	Max. conductor resistance (Ω/km)	Current rating in the earth (A)	Current rating in the air (A)	Outer diameter appr. (mm)	Total weight appr. (kg/km)	Standard lengths/packing (m)
1 x 35 RM / 16	0.24	0.868	145	153	28.0	650	500 T, 1000 T
1 x 50 RM / 16	0.26	0.641	171	183	27.0	750	500 T, 1000 T
1 x 70 RM / 16	0.3	0.443	208	228	28.0	850	500 T, 1000 T
1 x 95 RM / 16	0.31	0.32	248	278	30.0	950	500 T, 1000 T
1 x 120 RM / 16	0.34	0.253	325	285	32.0	1100	500 T, 1000 T
1 x 150 RM / 25	0.39	0.206	315	364	32.0	1150	500 T, 1000 T
1 x 185 RM / 25	0.42	0.164	357	418	36.0	1450	500 T, 1000 T
1 x 240 RM / 25	0.47	0.125	413	494	38.0	1600	500 T, 1000 T
1 x 300 RM / 25	0.51	0.1	466	567	47.5	2100	500 T, 1000 T
1 x 400 RM / 35	0.57	0.078	529	660	43.0	2350	500 T, 1000 T
1 x 500 RM / 35	0.63	0.061	602	767	55.0	2850	500 T, 1000 T
1 x 630 RM / 35	0.65	0.047	675	890	52.0	3060	500 T, 1000 T

**CONTACT PERSON**

**Dogan Özcan**  
 Head of Technical Department  
 +43 (0) 1 70170-154  
 dogan.oezcan@skw.at

