



We Make  
Modern Life  
Possible



# NA2XS(F)2Y 18/30 kV

XLPE/HDPE medium voltage underground cable,  
longitudinally water-proof

ALUMINIUM – VDE

For fixed installation for high requirements in the ground subject to external effects of moisture, in the open air and in cable ducts for industrial and distribution mains – as permitted by the local building regulations – under severe mechanical stressing during installation and operation.



## TECHNICAL DATA



**Standard**  
DIN VDE 0276-620



**Certificate**  
VDE Germany



**Test Voltage**  
63 kV / 50 Hz



**Rated Voltage**  
18/30 kV (U<sub>0</sub>/U)




**Bending radius (min.)**  
15 x  $\varnothing$  of cable



**Temperature range**  
Laying temperature: min. -20°C  
Operating temperature: -50°C up to 90°C  
Conductor temperature: max. 90°C  
Short circuit temperature: max. 250°C

## DESIGN

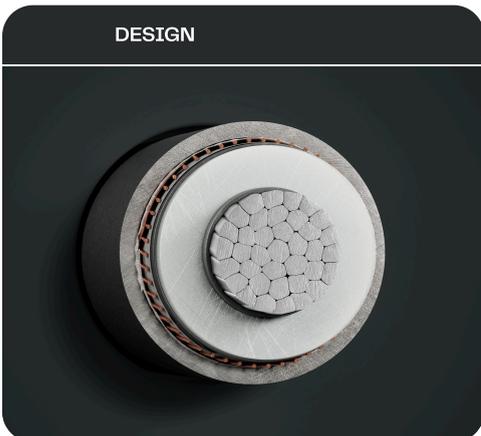

Number of cores x nominal cross-section / cross-section of screen (mm <sup>2</sup> )	Mutual capacitance (nF/km)	Max. conductor resistance (Ω/km)	Current rating in the earth (A)	Current rating in the air (A)	Outer diameter appr. (mm)	Total weight appr. (kg/km)	Standard lengths/packing (m)
1 x 50 RM / 16	0.14	0.641	174	187	36.0	1150	500 T, 1000 T
1 x 70 RM / 16	0.15	0.443	213	232	38.0	1300	500 T, 1000 T
1 x 95 RM / 16	0.17	0.32	254	282	33.0	1450	500 T, 1000 T
1 x 120 RM / 16	0.18	0.253	325	289	39.0	1750	500 T, 1000 T
1 x 150 RM / 25	0.19	0.206	322	367	41.3	1800	500 T, 1000 T
1 x 185 RM / 25	0.21	0.164	364	421	44.0	1950	500 T, 1000 T
1 x 240 RM / 25	0.23	0.125	422	496	46.0	2200	500 T, 1000 T
1 x 300 RM / 25	0.25	0.1	476	568	48.0	2400	500 T, 1000 T
1 x 400 RM / 35	0.27	0.078	541	659	51.0	3000	500 T, 1000 T
1 x 500 RM / 35	0.3	0.061	616	764	54.0	3100	500 T, 1000 T
1 x 630 RM / 35	0.32	0.047	675	890	57.5	3790	500 T, 1000 T
1 x 800 RM / 35	0.35	0.037	750	1015	65.0	4367	500 T, 1000 T
1 x 1000 RM / 35	0.38	0.031	820	1100	72.0	5000	500 T, 1000 T
1 x 1200 RM / 35	0.4	0.025	900	1200	78.0	5700	500 T, 1000 T

**CONTACT PERSON**

**Dogan Özcan**  
 Head of Technical Department  
 +43 (0) 1 70170-154  
 dogan.oezcan@skw.at

