




H07V-R (Ym)

PVC insulated wires, stranded

HARMONISED INSULATED WIRES

For fixed installation in conduits on or under plaster. Suitable for protected installation in and on lighting facilities or control devices for voltages up to 750 V AC or 1000 V DC against ground.

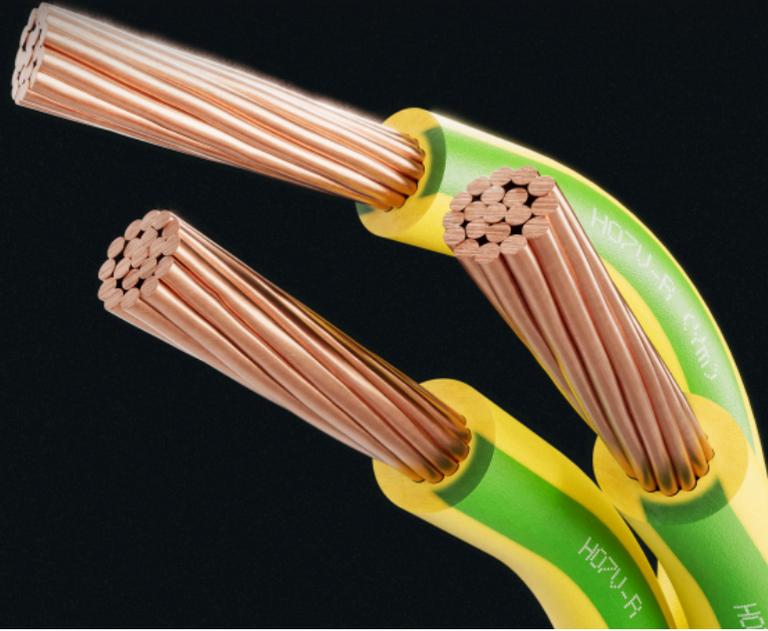

TECHNICAL DATA



Standard
EN 50525-2-31



Rated Voltage
450/750 V (U_o/U)



Core identification
According to EN 50525-1: CR, SM, MD,
HA, SE, OR, RZ, RA, TY, FI, BA, ZZ



Certificate
EZÚ Czech Republic
ÖVE Austria



Bending radius (min.)
4 x Ø up to 8 mm
5 x Ø 8 up to 12 mm
6 x Ø over 12 mm



Temperature range
Laying temperature: min. 5°C
Operating temperature: -5°C up to 70°C
Conductor temperature: max. 70°C
Short circuit temperature: max. 160°C



Test Voltage
2.5 kV / 50 Hz



Fire properties
EN 60332-1-2: self-extinguishing
CPR Classification: Eca

DESIGN



- 1 Copper conductor, round stranded (RM) -U
- 2 Core insulation (PVC)

Nominal cross-section (mm ²)	Max. conductor resistance (Ω/km)	Current rating in the air (A)	Outer diameter appr. (mm)	Total weight appr. (kg/km)
6	3.08	59	4.4	64
10	1.83	81	6.0	120
16	1.15	107	6.8	164
25	0.727	144	8.5	256
35	0.524	176	9.7	346
50	0.387	214	11.3	469
70	0.268	270	12.9	660
95	0.193	334	15.0	912
120	0.153	389	16.5	1133
150	0.124	446	18.1	1401
185	0.099	516	20.6	1751
240	0.075	618	23.4	2291
300	0.060	711	26.1	2866

CONTACT PERSON

Dogan Özcan
Head of Technical Department
+43 (0) 1 70170-154
dogan.oezcan@skw.at

