




H07Z-K

Insulated wire, halogen-free, fine wire

HALOGEN-FREE INSTALLATION CABLES

For fixed installation in conduits on or under plaster. Suitable for protected installation in and on lighting facilities or control devices for voltages up to 750 V AC or 1,000 V DC against ground. Suitable for hotels, hospitals, underground railways, airports etc. to protect people and technical building equipment in the event of fire.

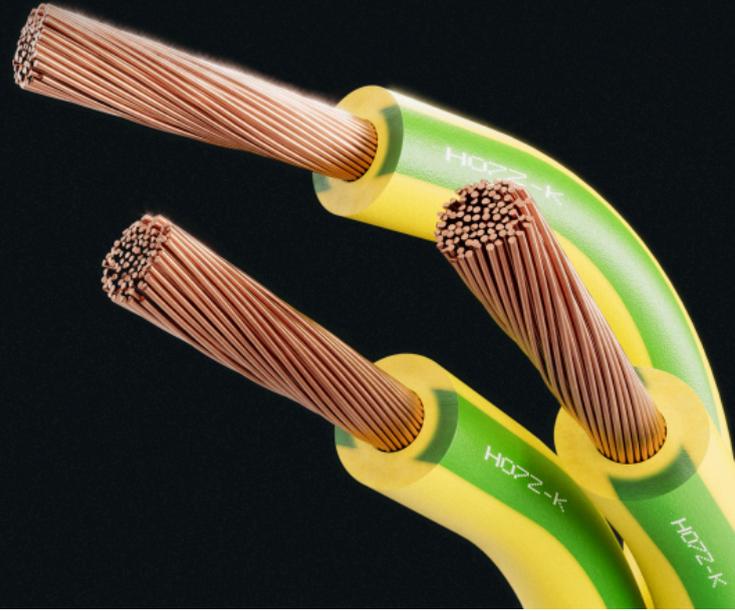

TECHNICAL DATA



Standard
EN 50525-3-41



Test Voltage
2.5 kV



Rated Voltage
450/750 V (U₀/U)



Bending radius (min.)
5 x ϕ of wire (fixed installed)
12 x ϕ of wire (free motion)



Fire properties
EN 60332-1-2: flame retardant
EN 60754-1 and 2: halogen-free; non-corrosive
combustion gases
EN 61034-2: low smoke emission
CPR classification: Eca



Core identification
HD 308 S2

DESIGN



- 1 Copper conductor, fine wire (-K)
- 2 Core insulation (XLPE)

Nominal cross-section (mm ²)	Core colours	Max. conductor resistance (Ω/km)	Outer diameter appr. (mm)	Total weight appr. (kg/km)	Standard lengths/packing (m)
1.5	bk, rd, gy, wh, gnye	13.3	3.0	19	100 R
2.5	bk, bn, rd, gn, bu, gy, wh, gnye	7.98	3.6	31	100 R
4	bk, bn, bu, gy, gnye	4.95	4.3	45	100 R
6	bk, bn, bu, gy, gnye	3.3	4.8	63	100 R
10	bk, bn, bu, gy, gnye	1.91	6.3	108	100 R
16	bk, bn, bu, gy, gnye	1.21	7.3	162	100 R
25	bk, bn, bu, gy, gnye	0.78	9.2	252	500 T, 1000 T
35	bk	0.554	10.1	338	500 T, 1000 T
50	bk	0.386	12.2	481	500 T, 1000 T
70	bk	0.272	14.1	670	500 T, 1000 T
95	bk	0.206	15.9	888	500 T, 1000 T
120	bk	0.161	17.8	1008	500 T, 1000 T
150	bk	0.129	19.7	1391	500 T, 1000 T
185	bk	0.106	22.0	1686	500 T, 1000 T
240	bk	0.080	25.2	2212	500 T, 1000 T

CONTACT PERSON

Dogan Özcan
 Head of Technical Department
 +43 (0) 1 70170-154
 dogan.oezcan@skw.at

