



We Make
Modern Life
Possible




2YSL(St)CY-J 0.6/1 kV EMV

PE/PVC motor power supply cable, screened

AUTOMATION AND MOTOR SUPPLY CABLES

These double screened motor supply and frequency converter cables 2YSL(St)CY-J were designed as supply and connecting cables, for medium mechanical stress, fixed installation and occasionally non-guided movements, in dry, damp and wet rooms. UV-resistant black sheath is designed for outdoor applications. Double screening considerably improves electromagnetic compatibility (EMC) in buildings and plants.

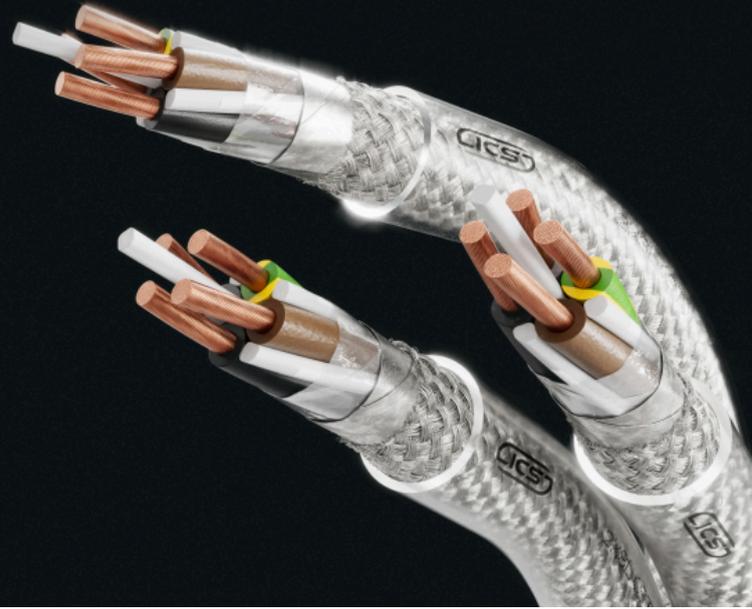

TECHNICAL DATA



Standard
DIN VDE 0276-603



Test Voltage
4000 V / 50 Hz



Rated Voltage
0.6/1 kV (U_o/U)



Bending radius (min.)
Fixed installation: 5 x \varnothing of cable
Flexible use: 15 x \varnothing of cable



Fire properties
EN 60332-1-2: self-extinguishing and flame retardant
CPR classification: Eca



Core identification
Colours according to CENELEC HD 308 S2



Temperature range
Conductor temperature: max. 70°C
Fixed installation: -30°C up to 80°C
Flexible use: -5°C up to 70°C

DESIGN



- 1 Bare copper conductors, fine wires class 5 according to DIN EN 60228 / VDE 0295 / IEC 60228
- 2 Core insulation of polyethylene (PE)
- 3 Cores are stranded together with optimal lay-length
- 4 Plastic tape separation (optional)
- 5 Plastic bonded aluminium tape and tinned copper wire braiding
- 6 Outer sheath of special compound of polyvinyl chloride (PVC), colour: black (RAL 9005) for 2YSL(St)CYK-J or transparent for 2YSL(St)CY-J

Number of cores x nominal cross-section (mm ²)	Outer diameter appr. (mm)	Cu-value (kg/km)	Total weight appr. (kg/km)
4 G 1.5	10.6	95	244
4 G 2.5	12.3	150	318
4 G 4	14.0	235	513
4 G 6	16.1	320	670
4 G 10	19.7	533	914
4 G 16	23.0	789	1367
4 G 25	27.3	1236	1970
4 G 35	30.3	1662	2763
4 G 50	35.0	2345	3126
4 G 70	40.0	3196	4182
4 G 95	45.0	4316	5725

**CONTACT PERSON**

Dipl. Ing. Peter Tomka
+421 37 6969631
peter.tomka@ics-cables.sk

