



We Make
Modern Life
Possible



2XSL(St)CYK-J 0.6/1 kV EMV-3 PLUS

XLPE/PVC motor power supply cable, screened

AUTOMATION AND MOTOR SUPPLY CABLES

2XSL(St)CYK-J double screened motor supply and frequency converter cables were designed as supply and connecting cables for medium mechanical stress, fixed installation and non-guided movements in dry, damp and wet rooms. Black UV-resistant version is designed for outdoor applications. XLPE insulation improves transmission characteristics and allows transmission of higher power when using same cross sections. Double screening considerably improves electromagnetic compatibility (EMC) in buildings and plants.



TECHNICAL DATA



Standard
DIN VDE 0276-603



Test Voltage
4000 V / 50 Hz



Rated Voltage
0.6/1 kV (U₀/U)



Bending radius (min.)
Fixed installation: 5 x \varnothing of cable
Flexible use: 15 x \varnothing of cable



Fire properties
EN 60332-1-2: self-extinguishing and flame retardant
CPR classification: Eca




Core identification
Colours according to CENELEC HD 308 S2



Temperature range
Conductor temperature: max. 90°C
Fixed installation: -30°C up to 80°C
Flexible use: -5°C up to 70°C

DESIGN

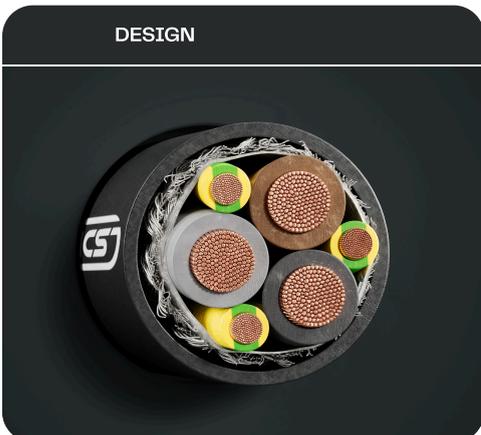

- 1 Bare copper conductors, fine wires class 5 according to DIN EN 60228 / VDE 0295 / IEC 60228
- 2 Core insulation of cross-linked polyethylene (XLPE)
- 3 Cores are stranded together with optimal lay-length
- 4 Plastic tape separation (optional)
- 5 Plastic bonded aluminium tape and tinned copper wire braiding
- 6 Outer sheath of special compound of polyvinyl chloride (PVC), colour: black (RAL 9005) for 2XSL(St)CYK-J or transparent for 2XSL(St)CY-J

Number of cores x nominal cross-section (mm ²)	Outer diameter appr. (mm)	Cu-value (kg/km)	Total weight appr. (kg/km)
3 x 1.5 + 3 G 0.25	10.2	91	212
3 x 2.5 + 3 G 0.5	11.8	152	276
3 x 4 + 3 G 0.75	13.4	224	446
3 x 6 + 3 G 1	15.3	298	582
3 x 10 + 3 G 1.5	18.6	491	794
3 x 16 + 3 G 2.5	21.5	723	1188
3 x 25 + 3 G 4	25.5	1138	1713
3 x 35 + 3 G 6	28.3	1535	2402
3 x 50 + 3 G 10	33.0	2208	2718
3 x 70 + 3 G 10	37.0	2871	3636
3 x 95 + 3 G 16	41.0	3953	4978
3 x 120 + 3 G 16	43.8	4836	5077

CONTACT PERSON

Dipl. Ing. Peter Tomka
+421 37 6969631
peter.tomka@ics-cables.sk

