




TCEPKPFLEY

PE/PE/PVC ground telecommunication cables,
screened

The cables are waterproof and designed for external telecommunications networks stored in the ground, cable ducts or pipes. Cables are also applicable to various types of transmission systems including ADSL2 + and VDSL2.

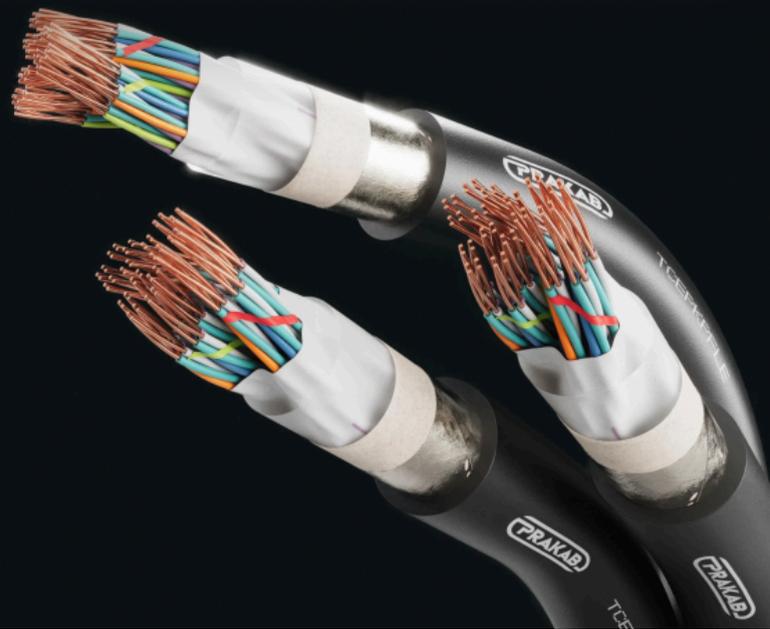

TECHNICAL DATA



Standard

TP PRAKAB 08/97
ČSN EN 60708



Certificate

EZÚ Czech Republic



Test Voltage

core/core 500 V / 50 Hz
core/screen 1000 V / 50 Hz



Rated Voltage

250 V



Bending radius (min.)

10 x \varnothing of cable



Core identification


ČSN EN 60708



Temperature range

Laying temperature: min. -10°C
Operating temperature: -40°C up to 70°C

DESIGN

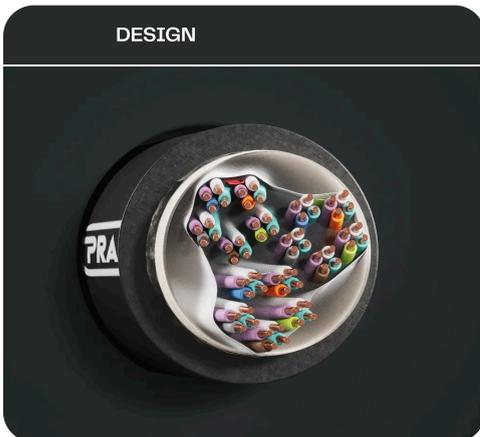

- 1 Copper conductor, round solid (RE)
- 2 Core insulation (foam skin PE), cores star quaded and quads stranded in groups, core stranding petrol jelly filled
- 3 Inner covering (paper tape)
- 4 Screen (copolymer laminated aluminium tape which is welded to the PE sheath)
- 5 Sheath (PE black, UV-resistant)
- 6 Sheath (PVC black, UV-resistant)

Electrical parameters

Loop resistance, max. at 20 °C	Ω/km	< 74
Insulation resistance, min. / tested	GΩ/km	1.5 / 10
Mutual capacitance, max. average	nF/km	42
Mutual capacitance, max. single	nF/km	49
Attenuation at 16 kHz, max.	dB/km	3
Attenuation at 80 kHz, max.	dB/km	5
Capacitance unbalanced, max. k1	pF/500 m	160
Conductor diameter	mm	0.8

Number of elements x element x conductor diameter	Outer diameter appr. (mm)	Total weight appr. (kg/km)
3 x 4 x 0.8	16.9	300
5 x 4 x 0.8	19.0	390
10 x 4 x 0.8	23.1	591
15 x 4 x 0.8	25.8	762
20 x 4 x 0.8	28.4	936

CONTACT PERSON

Ing. Štěpán Laštůvka
Product Supervisor
+420 732 912 682
stepan.lastuvka@prakab.com

