




H05Z-K

XLPE insulated wire, halogen-free

INSTALLATION AND HARMONISED CABLES AND WIRES

These halogen-free and flame retardant single cores are intended for fixed and protected installations, for internal wiring of equipment and lightings, for signaling and control circuits, especially for the protection of human life and valuable equipment.

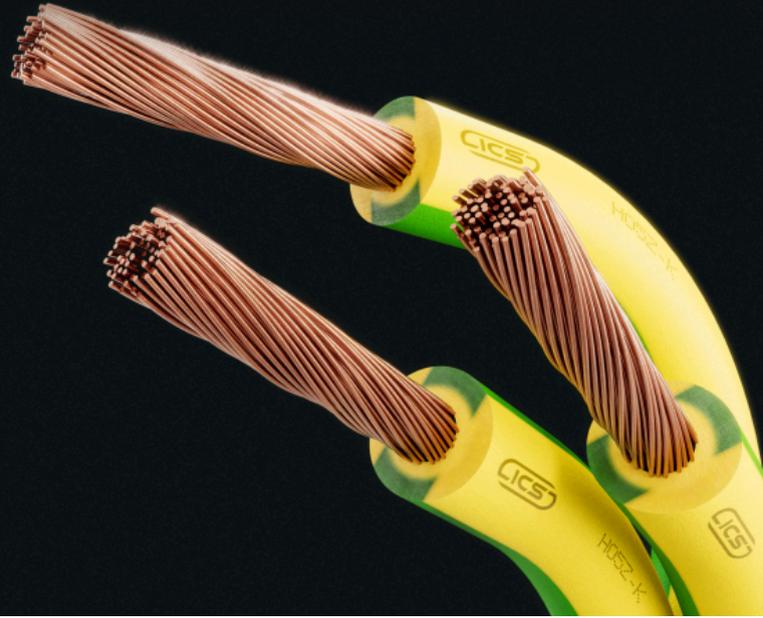

TECHNICAL DATA



Standard
EN 50525-3-41



Test Voltage
2000 V / 50 Hz



Rated Voltage
300/500 V (U_o/U)



Bending radius (min.)
Fixed installation: 3 x ϕ of cable
Flexible use: 5 x ϕ of cable



Fire properties
EN 60332-1-2: self-extinguishing and flame retardant



Core identification
According to EN 50525-1 - black, white, blue, brown, red, orange, violet, pink, green/yellow, yellow, green, grey



Temperature range
Fixed installation: -40°C up to 90°C
Flexible use: -20°C up to 90°C

DESIGN



1

Bare copper conductors, fine wires class 5 according to DIN EN 60228 / VDE 0295 / IEC 60228

2

Core insulation of special halogen-free, flame retardant compound based on cross-linked polymer (XLPE)

Number of cores x nominal cross-section (mm ²)	Outer diameter appr. (mm)	Cu-value (kg/km)	Total weight appr. (kg/km)
1x0,5	2.2	4.8	9
1x0,75	2.4	7.2	12
1x1	2.6	9.6	14

**CONTACT PERSON**

Jan Pietron
Key Account Manager
+420 604 471 907
jan.pietron@koneka.cz

