




# Copper wire braidings, flat

Bare copper braidings, flat

EARTHING AND SHORT CIRCUITING CABLES AND BARE WIRES

Conductors are used for flexible connection of electrical equipments and for earthing applications

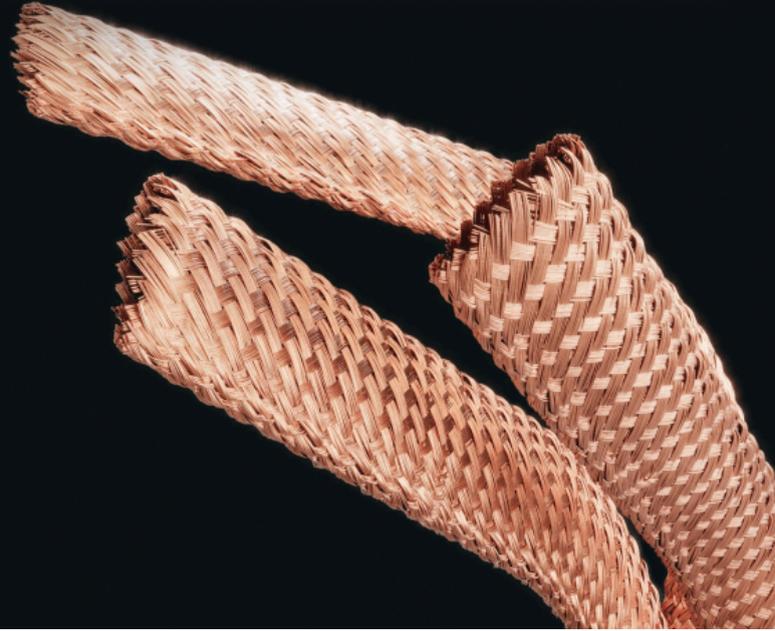

## TECHNICAL DATA



Standard  
TP PRAKAB 11/02

## DESIGN



Nominal cross-section (mm <sup>2</sup> )	Single wire diameter (mm)	Max. conductor resistance (Ω/km)	Width of flattened conductor (mm)	Height of flattened conductor (mm)	Total weight appr. (kg/km)
6	0.071	3.248	8.5	0.9	55
10	0.071	1.949	11.5	1.2	95
10	0.1	1.949	11.2	1.3	99
16	0.071	1.218	15.2	1.4	145
16	0.1	1.218	15.5	1.5	155
20	0.071	0.974	16.8	1.7	195
25	0.071	0.78	19	1.9	245
25	0.1	0.78	20	2	250
25	0.2	0.78	22	1.6	218
35	0.071	0.557	21.5	2.4	365
35	0.1	0.557	24	2.2	335
35	0.2	0.557	24.5	2.4	345
50	0.1	0.39	28.5	2.8	525
50	0.2	0.39	31	2.7	500
70	0.2	0.278	35	3.8	700

**CONTACT PERSON**

**Ing. Štěpán Laštůvka**  
Product Supervisor  
+420 732 912 682  
stepan.lastuvka@prakab.com

