




# Cu rope, RMn, hard, BS

Cu rope, hard, non-compressed

## BARE CONDUCTORS

Conductors are designed for connection of points with equal electric potential or for high currents.

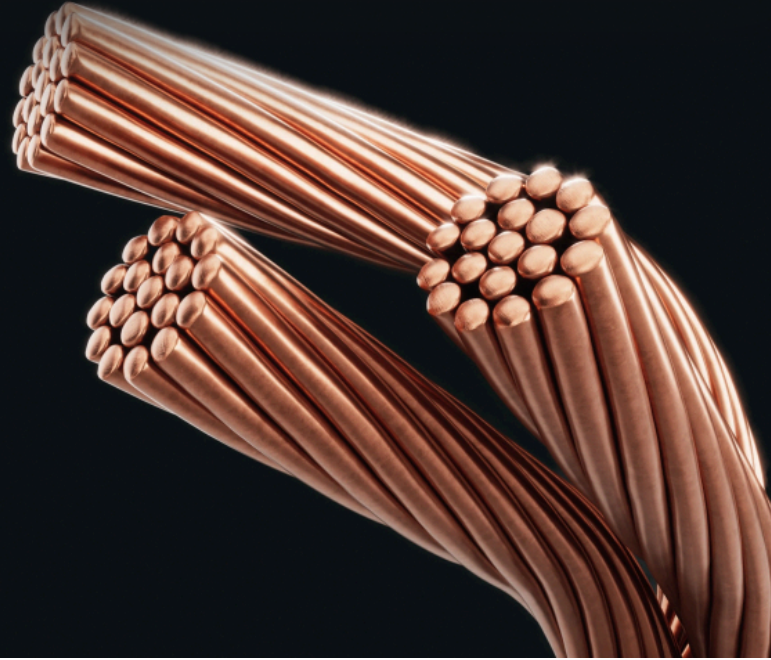

## TECHNICAL DATA



Standard  
BS 7884



Bending radius (min.)  
15 x  $\varnothing$  rope

## DESIGN



Conductor cross section (mm <sup>2</sup> )	Number of wires in the rope	Direction of outer layer	Max. conductor resistance (Ω/km)	Outer diameter appr. (mm)	Total weight appr. (kg/km)
10	7	right (Z)	1.829	4.1	90
14	7	right (Z)	1.303	4.8	130
16	3	right (Z)	1.106	5.7	150
16	7	right (Z)	1.154	5.1	145
25	7	right (Z)	0.756	6.3	220
32	3	right (Z)	0.552	8.1	300
32	7	right (Z)	0.55	7.5	300
35	7	right (Z)	0.534	7.5	310
50	7	right (Z)	0.382	9.0	440
70	19	right (Z)	0.281	10.5	595
95	19	right (Z)	0.198	12.5	845
100	7	right (Z)	0.181	12.9	915
120	19	right (Z)	0.158	14.0	1055
125	19	right (Z)	0.147	14.5	1135
150	37	right (Z)	0.126	15.8	1340
185	37	right (Z)	0.102	17.5	1650

**CONTACT PERSON**

**Jan Pietroň**  
Key Account Manager  
+420 604 471 907  
jan.pietron@koneka.cz

