




HSLH

FRNC control cable, halogen-free, unscreened

INSTALLATION AND HARMONISED CABLES AND WIRES

As flexible control and connecting cable for fixed laying and flexible applications without tensile stress and/or without guided movements. For the protection of human life and valuable equipment, especially when excellent EMC behavior is requested.

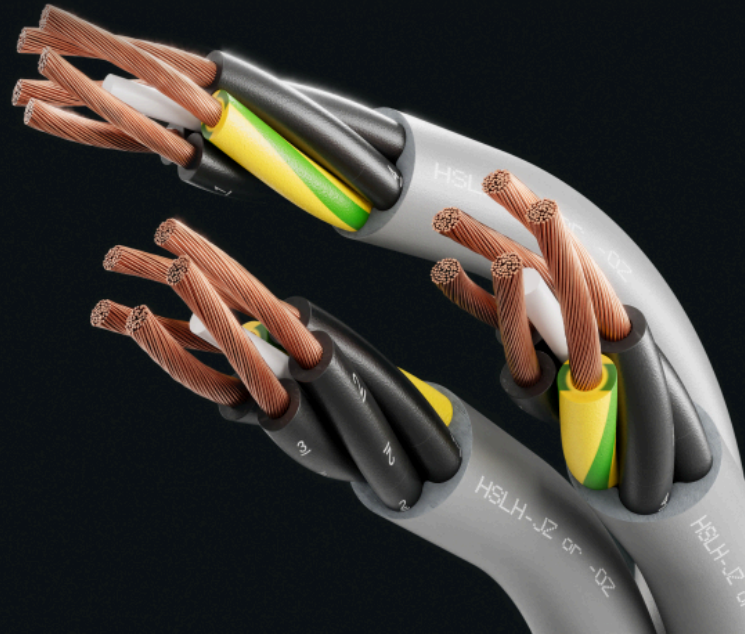

TECHNICAL DATA



Test Voltage
2 kV



Rated Voltage
300/500 V (U₀/U)



Bending radius (min.)
4 x ϕ of cable (fixed installed)
15 x ϕ of cable (free motion)



Fire properties
EN 60332-1-2: flame retardant
EN 60754-1 and 2: halogen-free; non-corrosive combustion gases
EN 61034-2: low smoke emission
EN 60332-3-22 and 24: reduced flame propagation
CPR classification: Eca



Core identification
black with number printing, with one core green/yellow (JZ), without (OZ)

DESIGN



- 1 Copper conductor, fine wire
- 2 Core insulation (FRNC), cores stranded in layers
- 3 Sheath (FRNC grey RAL 7001, oil resistant)

Number of cores x nominal cross-section (mm ²)	Max. conductor resistance (Ω/km)	Outer diameter appr. (mm)	Total weight appr. (kg/km)
2 x 0,75	26.0	5.2	40
3 x 0,75	26.0	5.5	48
4 x 0,75	26.0	6.0	59
5 x 0,75	26.0	6.5	70
7 x 0,75	26.0	7.3	94
12 x 0,75	26.0	9.7	153
18 x 0,75	26.0	11.5	221
25 x 0,75	26.0	13.7	297
2 x 1	19.5	5.6	47
3 x 1	19.5	5.9	58
4 x 1	19.5	6.5	71
5 x 1	19.5	7.3	88
7 x 1	19.5	7.9	113
12 x 1	19.5	10.5	185
18 x 1	19.5	12.5	268
25 x 1	19.5	14.9	384
2 x 1,5	13.3	6.0	58
3 x 1,5	13.3	6.4	72
4 x 1,5	13.3	7.2	93
5 x 1,5	13.3	7.8	111
7 x 1,5	13.3	8.5	144
12 x 1,5	13.3	11.6	243
18 x 1,5	13.3	13.5	346
25 x 1,5	13.3	16.2	467
34 x 1,5	13.3	22.0	922
2 x 2,5	7.98	7.1	85
3 x 2,5	7.98	7.5	108
4 x 2,5	7.98	8.3	135
5 x 2,5	7.98	9.0	162
7 x 2,5	7.98	10.1	219
12 x 2,5	7.98	13.4	361
4 x 4	4.95	10.3	209
5 x 4	4.95	11.3	252
4 x 6	3.3	11.9	298
5 x 6	3.3	13.1	360
5 x 10	1.91	17.4	623

CONTACT PERSON

Jan Pietroň
Key Account Manager
+420 604 471 907
jan.pietron@koneka.cz

