



1-AYY









PVC/PVC aluminium energy cables

LOW VOLTAGE CABLES 0,6/1 kV


The cables are designed for fixed installation on cable trays, cable ducts or ground.



TECHNICAL DATA

 <p>Standard ČSN 34 7659-3P</p>	 <p>Rated Voltage 0.6/1 kV</p>	 <p>Core identification HD308 S2 (CR, HA, MD, SE, ZZ and others depending on customer demand)</p>
 <p>Certificate EZÚ Czech Republic</p>	 <p>Bending radius (min.) 15 x Ø of cable</p>	 <p>Temperature range Laying temperature: min. -10°C Operating temperature: -50°C up to 70°C Conductor temperature: max. 70°C Short circuit temperature: max. 140°C</p>
 <p>Test Voltage 4 kV / 50 Hz</p>	 <p>Fire properties ČSN EN 60332-1-2: self-extinguishing CPR classification: Eca</p>	

DESIGN

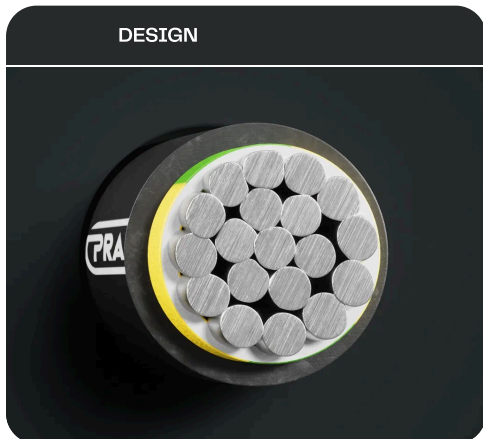

- 1 Aluminium conductor, round stranded (RM)
- 2 Core insulation (PVC)
- 3 Sheath (PVC black, UV-resistant)

Number of cores x nominal cross-section (mm ²)	Max. conductor resistance (Ω/km)	Current rating in the earth (A)	Current rating in the air (A)	Outer diameter appr. (mm)	Total weight appr. (kg/km)
1 x 25 RM	1.2	160	110	12.0	150
1 x 35 RM	0.868	193	135	13.0	195
1 x 50 RM	0.641	230	166	14.6	250
1 x 70 RM	0.443	283	210	16.2	300
1 x 95 RM	0.32	340	259	18.3	520
1 x 120 RM	0.253	389	302	19.8	595
1 x 150 RM	0.206	436	345	21.5	715
1 x 185 RM	0.164	496	401	24.2	900
1 x 240 RM	0.125	578	479	26.8	1090
1 x 300 RM	0.1	656	555	29.9	1390
1 x 400 RM	0.078	756	653	32.6	1790
1 x 500 RM	0.061	873	772	36.9	2130

CONTACT PERSON

Jan Pietroň
Key Account Manager
+420 604 471 907
jan.pietron@koneka.cz

