



HO1N2-D (NSLFFöu)

Rubber welding cable

RUBBER CABLES

Single core cable for connection to electrofusion units as hand-held electrode cable or as ground cable for use in dry, damp rooms and outdoors. HO1N2-E (finest wire) on request.



TECHNICAL DATA



Standard
CENELEC HD 22.6 S2



Certificate
VDE Germany



Test Voltage
1 kV



Rated Voltage
100/100 V (U₀/U)



Bending radius (min.)
4 x Ø of cable




Fire properties
EN 60332-1-2: flame retardant



Temperature range
Laying temperature: min. -20°C
Operating temperature: -20°C up to 80°C
Conductor temperature: max. 85°C
Short circuit temperature: max. 250°C

DESIGN

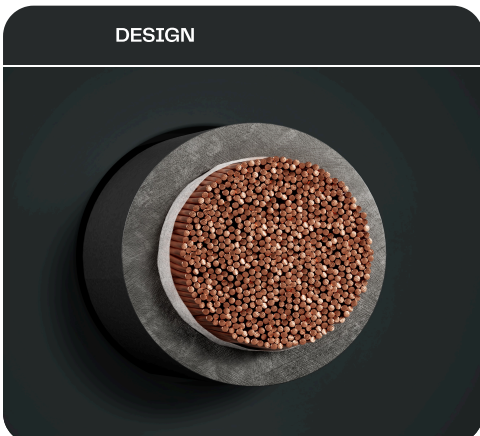

Nominal cross-section (mm ²)	Max. conductor resistance (Ω/km)	Diameter of wire (mm)	Outer diameter appr. (mm)	Total weight appr. (kg/km)	Standard lengths/packing (m)
10	1.91	0.21	8.5	150	500 T, 1000 T
16	1.21	0.21	10.0	220	500 T, 1000 T
25	0.78	0.21	11.5	300	500 T, 1000 T
35	0.554	0.21	13.0	410	500 T, 1000 T
50	0.368	0.21	15.0	560	500 T, 1000 T
70	0.272	0.21	17.0	770	500 T, 1000 T
95	0.206	0.21	19.5	1050	500 T, 1000 T
120	0.161	0.51	22.0	1290	500 T, 1000 T
150	0.129	0.51	23.5	1590	500 T, 1000 T

CONTACT PERSON

Dogan Özcan
Head of Technical Department
+43 (0) 1 70170-154
dogan.oezcan@skw.at

