




FLEXICS® JET 400Hz 2X11Y

Stranded ground power supply cable, with control cores, tinned and halogen-free

SPECIAL CABLES

400 Hz cables are mainly used to supply power to aircrafts (onboard power). May be operated in mobile, stationary or underground mode. Simple, long-lasting and easy to install design with a fair market price and great quality.

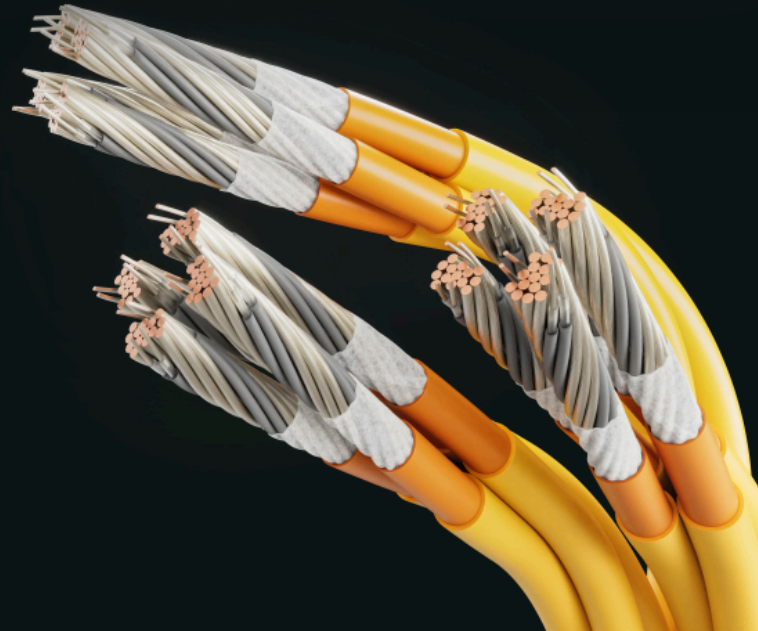

TECHNICAL DATA



Test Voltage
4000 V / 50 Hz



Rated Voltage
0.6/1 kV (U₀/U)



Bending radius (min.)
6 x ϕ of cable



Fire properties
EN 60332-1-2, IEC 60332-1-2: selfextinguishing and flame retardant
IEC 60754-1: halogen-free



Core identification
Grey (continuously numbered)



Temperature range
Operating temperature: -40°C up to 90°C

DESIGN



- 1 Tinned copper conductors, fine wires class 5 (control cores) and super fine wires class 6 (power cores) according to DIN EN 60228 / VDE 0295 / IEC 60228
- 2 Control core with two layer (natural & grey color) insulation on polypropylene and polyurethane basis, continuously numbered
- 3 Designed number of control cores stranded together within copper conductor strand
- 4 Non-woven tape separation
- 5 Primary outer sheath of special compound based on cross-linked polymer (XLPE), colour: orange (RAL 2003)
- 6 Secondary outer sheath of special polyurethane (PUR), colour: yellow (RAL 1021)
- 7 Cores with integrated control cores stranded together with optimized lay length

Number of cores x nominal cross-section (mm ²)	Outer diameter appr. (mm)	Cu-value (kg/km)	Total weight appr. (kg/km)
4 x (1 x 50 + 4 x 1)	42.6	2074	2769
4 x (1 x 70 + 4 x 1)	48.9	2844	3754
4 x (1 x 70 + 6 x 1)	50.8	2920	3857

CONTACT PERSON

Jan Pietroň
Key Account Manager
+420 604 471 907
jan.pietron@koneka.cz

