



NAYY









PVC/PVC aluminium energy cables

LOW VOLTAGE CABLES 0,6/1 kV


The cables are designed for distribution of electrical energy in fixed installation in the ground, cable ducts and in the external environment.



TECHNICAL DATA

 <p>Standard DIN VDE 0276-603 (HD 603)</p>	 <p>Rated Voltage 0,6/1 kV</p>	 <p>Core identification HD 308 S2</p>
 <p>Certificate VDE Germany</p>	 <p>Bending radius (min.) 12 x Ø of cable (multicore) 15 x Ø of cable (singlecore)</p>	 <p>Temperature range Laying temperature: min. -5°C Operating temperature: -50°C up to 70°C</p>
 <p>Test Voltage core/core 4 kV / 50 Hz</p>	 <p>Fire properties EN 60332-1-2: self-extinguishing OPR: Eca</p>	<p>Conductor temperature: max. 70°C Short circuit temperature: max. 140°C</p>

DESIGN

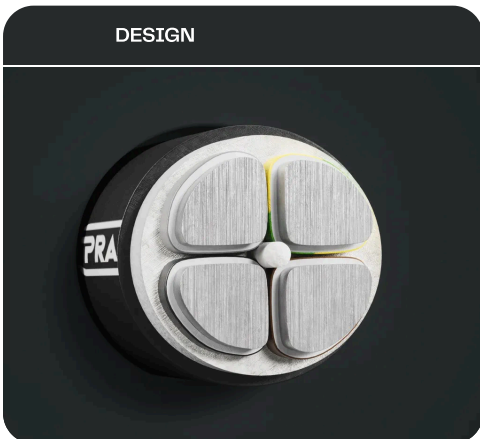

- 1 Aluminium conductor, round solid (RE), sector-shaped solid (SE), round stranded (RM), resp. sector-shaped stranded (SM)
- 2 Core insulation (PVC)
- 3 Inner covering (EPDM)
- 4 Sheath (PVC black, UV-resistant)

Number of cores x nominal cross-section (mm ²)	Max. conductor resistance (Ω/km)	Current rating in the air (A)	Current rating in the earth (A)	Outer diameter appr. (mm)	Total weight appr. (kg/km)
1 x 25 RM	1.2	110	160	12.6	210
4 x 25 RE	1.2	82	102	25.5	990
4 x 25 RM	1.2	82	102	26.7	1040
5 x 25 RE	1.2	82	102	28.8	1166
1 x 35 RM	0.868	135	193	13.6	260
4 x 35 RE	0.868	100	123	27.8	1130
4 x 35 RM	0.868	100	123	29.3	1180
5 x 35 RE	0.868	100	123	31.6	1432
1 x 50 RM	0.641	166	230	15.3	335
4 x 50 SE	0.641	119	144	31.9	1300
5 x 50 RM	0.641	119	144	38.2	2042
4 x 50 SM	0.641	119	144	34.4	1360
1 x 70 RM	0.443	210	283	16.9	425
4 x 70 SE	0.443	152	179	36.1	1740
4 x 70 SM	0.443	152	179	38.0	1820
5 x 70 RM	0.443	152	179	42.5	2591
1 x 95 RM	0.32	259	340	19.1	540
4 x 95 SE	0.32	186	215	40.3	2240
4 x 95 SM	0.32	186	215	43.0	2340
5 x 95 RM	0.32	186	215	49.2	3454
1 x 120 RM	0.253	302	389	20.6	610
4 x 120 SE	0.253	216	245	43.5	2660
4 x 120 SM	0.253	216	245	46.6	2780
5 x 120 RM	0.256	216	245	53.4	4080
1 x 150 RM	0.206	345	436	22.3	745
4 x 150 SE	0.206	246	275	47.7	3120
4 x 150 SM	0.206	246	275	50.4	3260
5 x 150 RM	0.206	246	275	58.7	4983
1 x 185 RM	0.164	401	496	24.6	925
4 x 185 SE	0.164	285	313	52.7	4170
4 x 185 SM	0.164	285	313	54.0	4230
5 x 185 RM	0.164	285	313	64.8	6079
1 x 240 RM	0.125	479	578	27.5	1210
4 x 240 SE	0.125	338	364	58.2	5150
4 x 240 SM	0.125	338	363	60.3	5380
1 x 300 RM	0.1	555	656	30.6	1440
1 x 400 RM	0.078	653	756	33.2	1850
1 x 500 RM	0.061	772	873	37.7	2190
1 x 630 RM	0.047	915	1011	42.9	2700

CONTACT PERSON

Vojtěch Cuřin
 Product Supervisor
 +420 731 226 023
 vojtech.curin@prakab.com

